

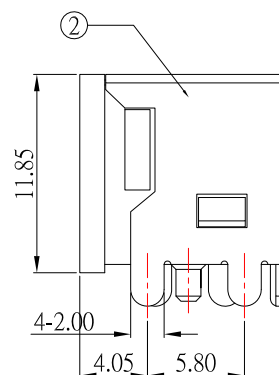




MATE PLUG $\phi 7.40$

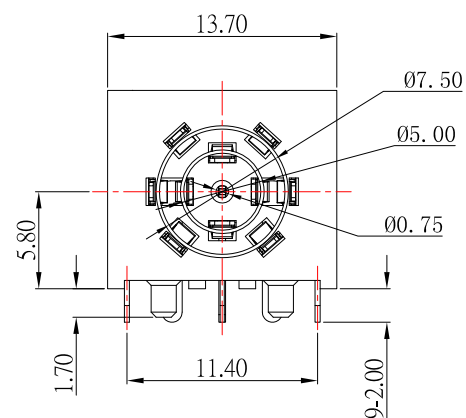

MODEL NO.	DC-D286CH-0.6-S214
SCHEMATIC	 2 (POWER PIN)  4 (CENTER PIN)  1 (GROUND PIN)

SPECIFICATION

- 1.Rating : DC 20V 5.0A
- 2.Contact resistance : $\leq 30\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

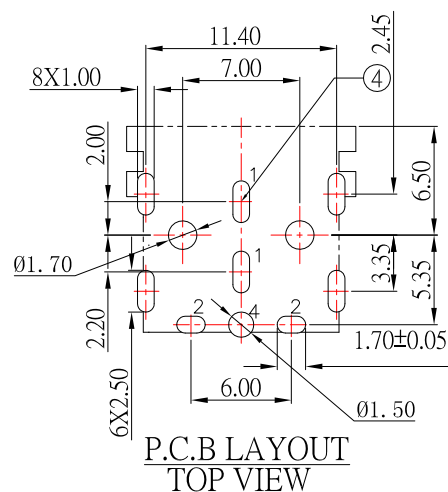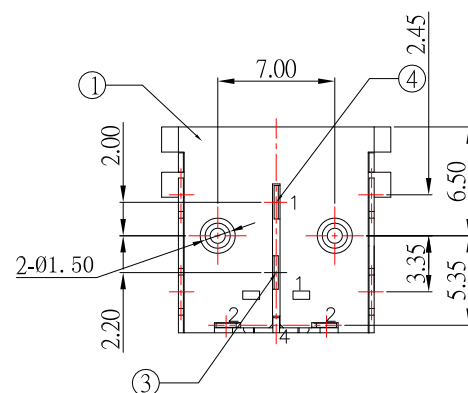

6	POWER	1	COPPER ALLOY	Au-Plating
5	POWER PIN	1	COPPER ALLOY	Au-Plating
4	GROUND PIN2	1	COPPER ALLOY	Au-Plating
3	GROUND PIN1	1	COPPER ALLOY	Au-Plating
2	SHIED	1	COPPER ALLOY	Ni-Plating
1	HOUSING	1	HIGH TEMP PLASTIC	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:	Up to 5 Above 5 ~ 15 Above 15 ~ 30 Above 30 ~ 50 Above 50 ~ 100	± 0.2 ± 0.3 ± 0.4 ± 0.5 ± 0.3	3RD. ANGEL'S		UNITS	MM
---------------------------------------	---	---	-----------------	---	-------	----

DRAWN BY:	DATE	MAT'L		TITLE	JACK	
Jack Lu	12/09/16					
CHECKED BY:	DATE	FINISH		MODLE	DC JACK	
Jacky Chen	12/09/16					
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	DC-D286CH-0.6-S214	SIZ
Tony Kao	12/09/16					A4
		SHEET NO.	1 of 1	PART NO.	DC-D286CH-0.6-S214	VER
						RI