






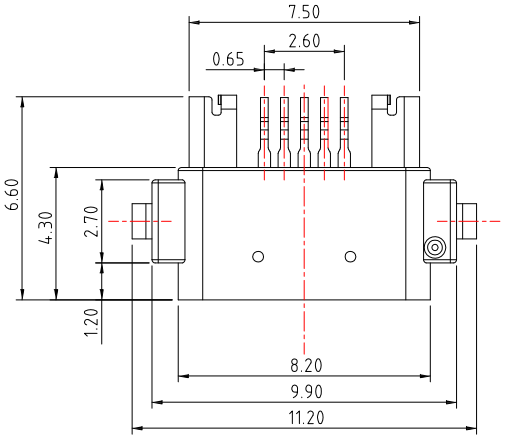



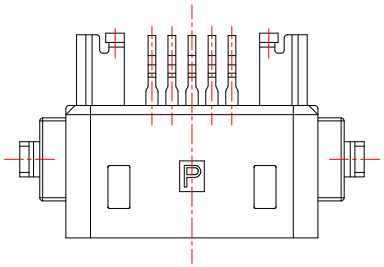

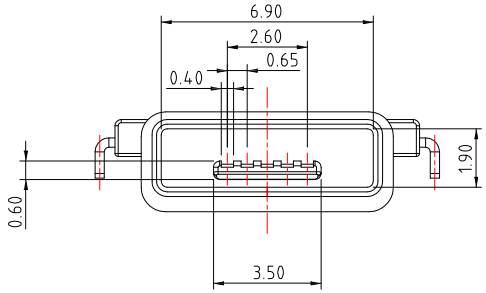

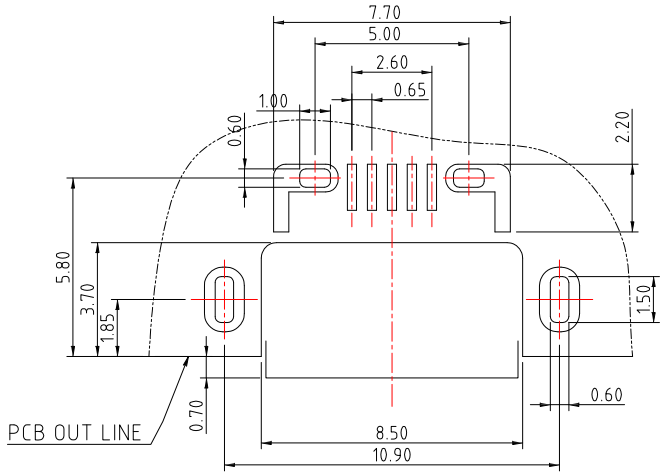

P.C.B LAYOUT MOUNTING PATTERN

NOTES:
MATERIAL:
1.1 HOUSING: LCP & PA9T,
1.2 CONTACT: PHOSPHOR BRONZE
1.3 SHELL: BRASS
FINISH:
2.1 CONTACT: PLATED GOLD IN MATING AREA ;
GOLD PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL
2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER
3.SPECIFICATION:
3.1 RATING: 30V DC/AC , 1.0A
3.2 DIELECTRIC WITHSSTANDING VOLTAGE: 500 VAC
3.3 CONTACT RESISTANCE: 30 mΩ MAX.
3.4 INSULATION RESISTANCE: 500 MΩ MIN.
3.5 TEMPERATURE RANGE: -20°C ~ +60°C
3.6 WATERPROOF LEVER:IP45

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	新增WATERPROOF LEVER	Jack	090717

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S | UNITS MM

		DATE
DRAWN BY:	Jack Lu	09/07/17
CHECKED BY:	Jacky Chen	09/07/17
APPROVED BY:	Tony Kao	09/07/17

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	MICRO USB 5PIN SMT(AB)TYPE 沉板平口防水型 板上H:1.45mm
SCALE	1 : 1	DWG NO.	MRUSB-5AB-WP3-S235 SIZE A4
SHEET NO.	1 of 1	PART NO.	MRUSB-5AB-WP3-S235 VER R1