


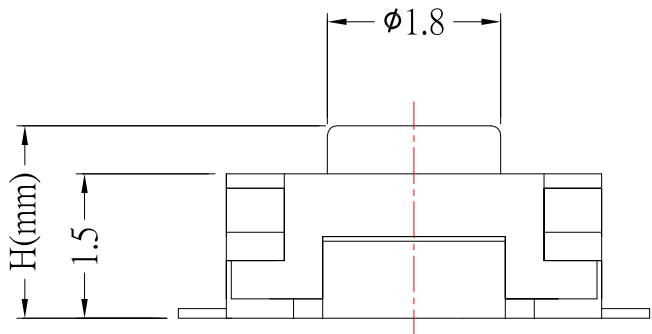

Rating	DC 12V 50mA Max.			
Contact Resistance	100mΩ Max.			
Travel	0.15 ± 0.1mm			
Operating Force	1 130 ± 50gf	2 160 ± 50gf	3 250 ± 50gf	4 320 ± 50gf
Operating Life (cycles)	100,000			

9	新增材質顏色	Jack	081324
8	新增材質表	Jack	080620
7	新增高度4.0選項	Jack	090515
6	更新高度選項	Jack	063015
ITEM NO.	DESCRIPTION	DRAWN	DATE

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
: Above 30 ~ 50	± 0.5
Angle	± 0.2

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	08/06/20
CHECKED BY:	DATE
Jacky Chen	08/06/20
APPROVED BY:	DATE
Tony Kao	08/06/20