

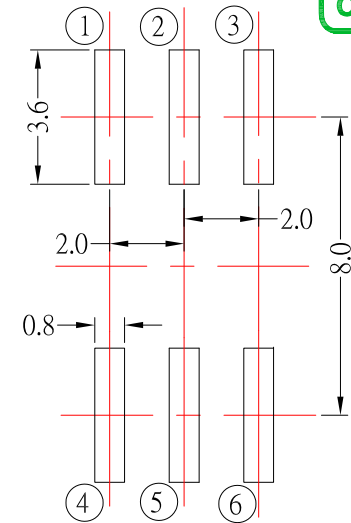
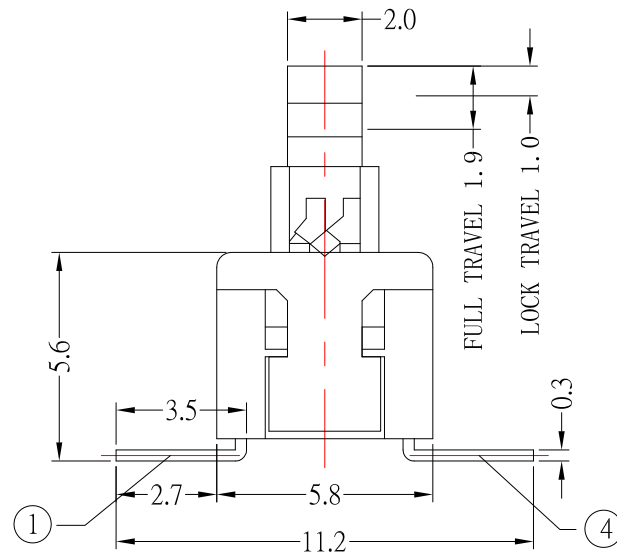


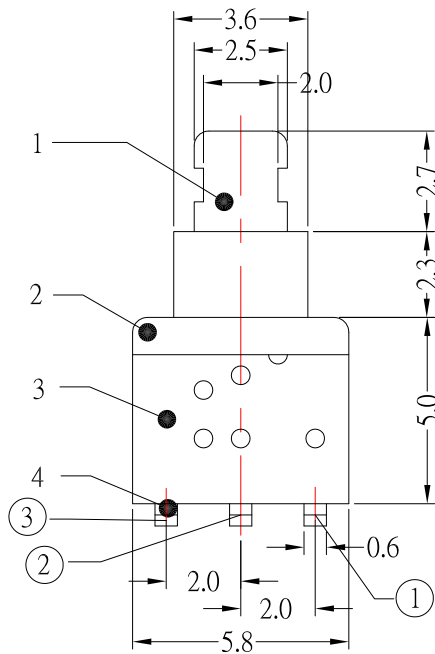

P.C.B LAYOUT

PS-D16Sx-S313

L	SelfLock
NL	Nonlock



CIRCUIT DIAGRAM

SPECIFICATIONS:

- 1.RATTING: 12V DC / 0.2A
- 2.CIRCUIT: 2C-2P
- 3.TIMING: NON-SHORTING
- 4.OPERATING FORCE: 250±100 gf

7	CONTACT	PHOSPHOR BRONZE	1	NATURAL
6	SPRING	SUS	1	NATURAL
5	LOCK PIN	SUS	1	Ni PLATED
4	TERMINAL	BRASS	1	Ag PLATED OVER Ni
3	COVER	PPA	1	BLACK
2	CASE	PPA	1	BLACK
1	KNOB	PA6T	1	WHITE
NO.	PARTS	MATERIALS	Q'TY	FINISH

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
------------------------------------	--	--------------	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	11/11/20	FINISH	MODLE	PUSH SWITCH
CHECKED BY:	DATE	SCALE	DWG NO.	PS-D16Sx-S313
Jacky Chen	11/11/20	1 : 1	PART NO.	PS-D16Sx-S313
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	11/11/20			

2	新增尺寸和接腳編號及更新材質	Jack	111120
1	更新材質	Jack	111516
ITEM NO.	DESCRIPTION	DRAWN	DATE