

RoHS Compliant

MRUSB-5B-M15Ax-S347


SHELL鍍層:


TN
NI

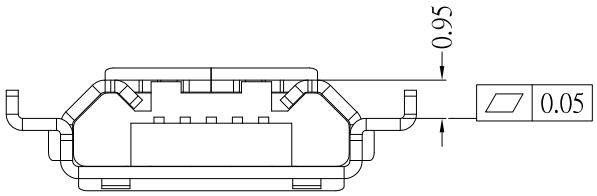






剖面 A-A

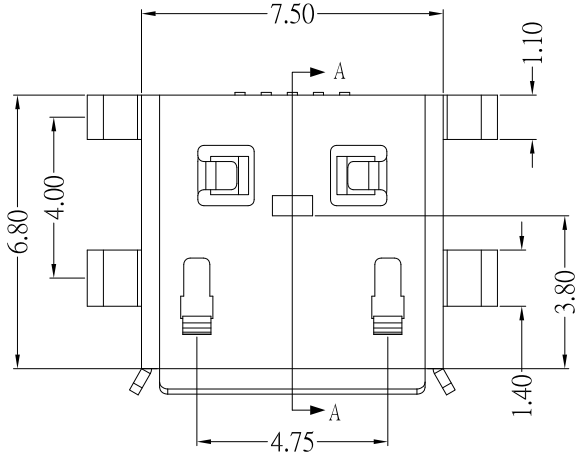



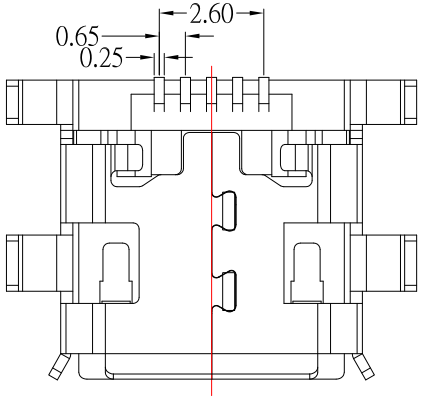

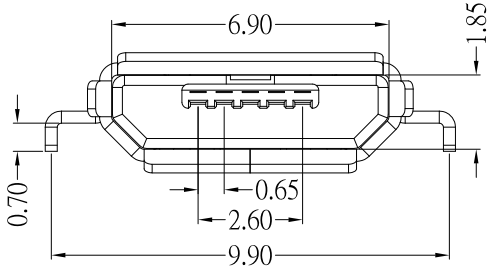

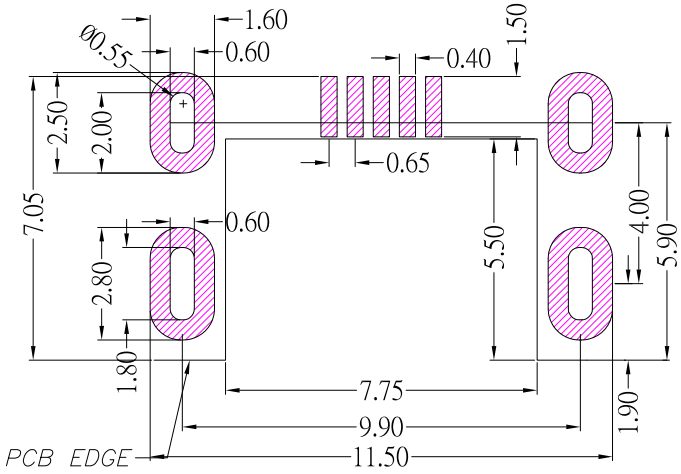

P.C.B LAYOUT MOUNTING PATTERN

NOTES:
MATERIAL:
1.1 HOUSING: LCP
1.2 CONTACT: PHOSPHOR BRONZE
1.3 SHELL: BRASS
FINISH:
2.1 CONTACT: PLATED GOLD IN MATING AREA ;
TIN PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL
2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER OR
TIN UNDER PLATED SURFACE LAYER
3.SPECIFICATION:
3.1 RATING: 1~5 PIN:1.8A , 2,3,4 PIN:1.0A
3.2 DIELECTRIC WITHSSTANDING VOLTAGE: 100 VAC FOR 1 MIN
3.3 CONTACT RESISTANCE: 30 mΩ MAX.
3.4 INSULATION RESISTANCE: 100 MΩ MIN.
3.5 TOTAL MATING FORCE: 3.57 Kgf MAX.
3.6 TOTAL UNMATING FORCE: 1.0 Kgf MIN.
3.7 TEMPERATURE RANGE: -30°C ~ +80°C

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	新增尺寸	Jack	110618
1	更新圖面及料號	Jack	041218

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S | UNITS | MM

		DATE
DRAWN BY:	Jack Lu	11/06/18
CHECKED BY:	Jacky Chen	11/06/18
APPROVED BY:	Tony Kao	11/06/18

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	MICRO USB 5B/F 沉板 板上H:1.5mm 四腳插
SCALE	1 : 1	DWG NO.	MRUSB-5B-M15Ax-S347
SHEET NO.	1 of 1	PART NO.	MRUSB-5B-M15Ax-S347

SIZE A4 | VER R2