



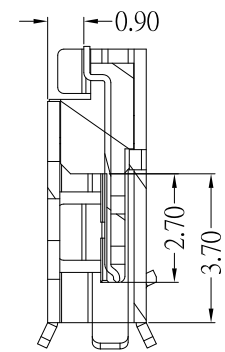






# MRUSB-5B-M15Ax-S347

SHELL 鍍層:

TN
NI

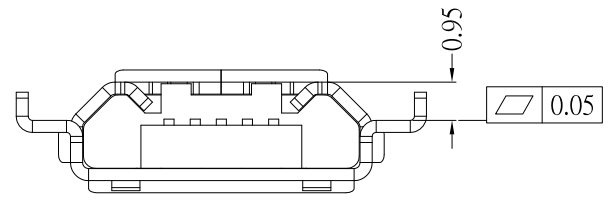

剖面 A-A

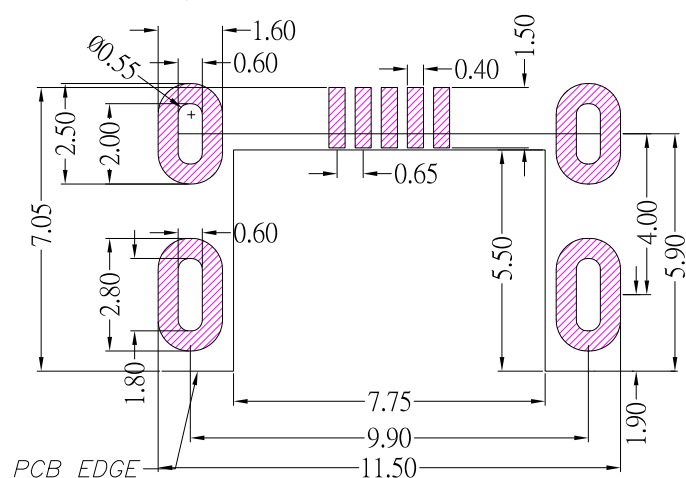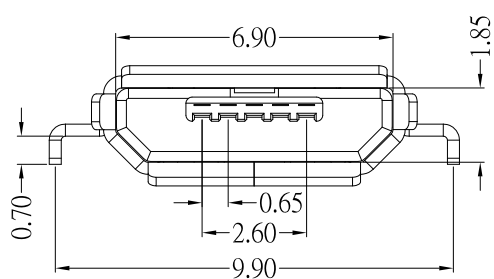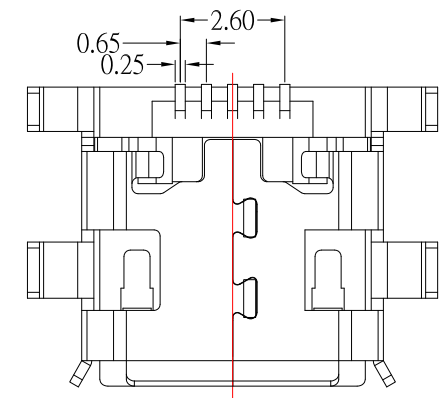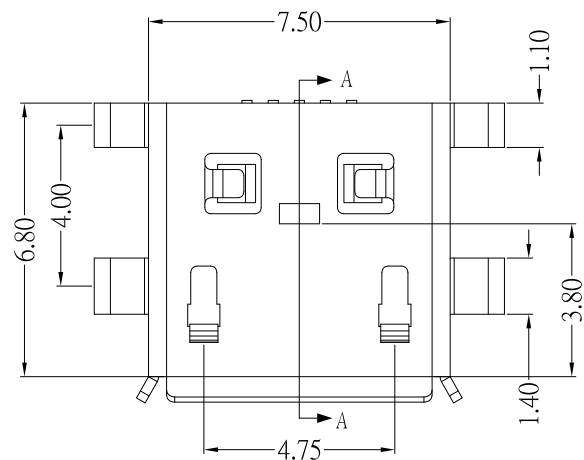

P.C.B LAYOUT MOUNTING PATTERN

- NOTES:
- MATERIAL:
- 1.1 HOUSING: LCP
  - 1.2 CONTACT: PHOSPHOR BRONZE
  - 1.3 SHELL: BRASS
- FINISH:
- 2.1 CONTACT: PLATED GOLD IN MATING AREA ;  
TIN PLATED ON SOLDER BALLS ;  
NICKEL UNDER PLATED OVERALL
  - 2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER OR  
TIN UNDER PLATED SURFACE LAYER
- 3.SPECIFICATION:
- 3.1 RATING: 1-5 PIN:1.8A , 2,3,4 PIN:1.0A
  - 3.2 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC FOR 1 MIN
  - 3.3 CONTACT RESISTANCE: 30 mΩ MAX.
  - 3.4 INSULATION RESISTANCE: 100 MΩ MIN.
  - 3.5 TOTAL MATING FORCE: 3.57 Kgf MAX.
  - 3.6 TOTAL UNMATING FORCE: 1.0 Kgf MIN.
  - 3.7 TEMPERATURE RANGE: -30°C ~ +80°C

**CONTACT** 建倚科技股份有限公司  
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2	3RD. ANGEL'S	UNITS	MM
	Above 5 ~ 15 ±0.3			
	Above 15 ~ 30 ±0.4			
	Above 30 ~ 50 ±0.5			
	Angle ±0.3°			

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	11/06/18		MODLE	MICRO USB 5B/F 沉板上H:1.5mm 四脚插
CHECKED BY:	DATE	FINISH	DWG NO.	MRUSB-5B-M15Ax-S347
Jacky Chen	11/06/18		PART NO.	MRUSB-5B-M15Ax-S347
APPROVED BY:	DATE	SCALE	SHEET NO.	1 of 1
Tony Kao	11/06/18	1 : 1		

2	新增尺寸	Jack	110618
1	更新圖面及料號	Jack	041218
ITEM NO.	DESCRIPTION	DRAWN	DATE