



SUA-110E14Ax-x-S235

Shell Material :

Blank : Brass

I : SPCC

Color :

White : W

Black : B

SPECIFICATIONS

Electrical:



- 1.Voltage Current Rating: 1.5 A , 30V DC
- 2.Contact Resistance: 30 mΩ Max
- 3.Insulation Resistance: 1,000 MΩ Min
- 4.Dielectric Withstanding Voltage: 500 V AC
- 5.Mating Force: 3.57 Kg Max
- 6.Umating Force: 1.02 Kg Min

Material:




- 1.Housing: PBT
- 2.Contact: Brass
- 3.Shell: Brass / Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

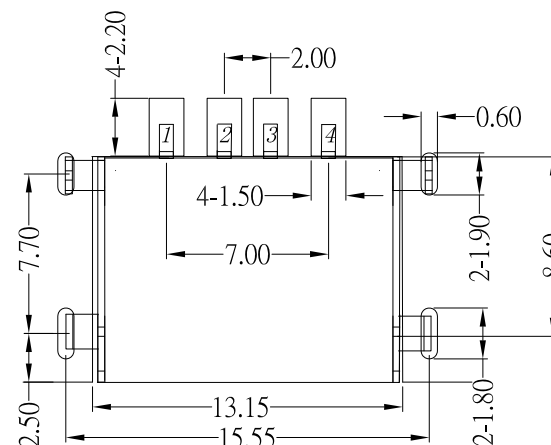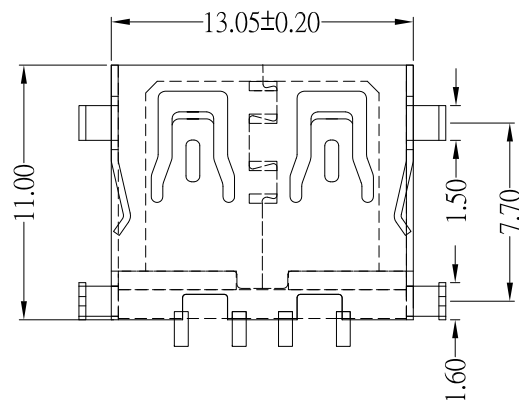

RECOMMEND P. C. B LAYOUT COMPONENT

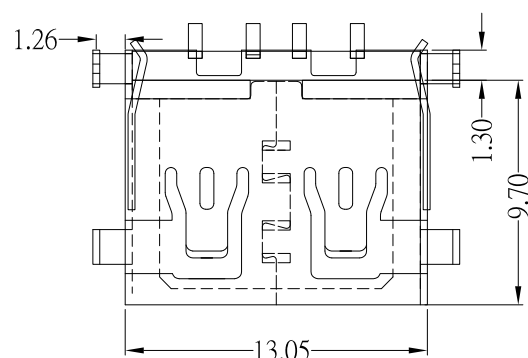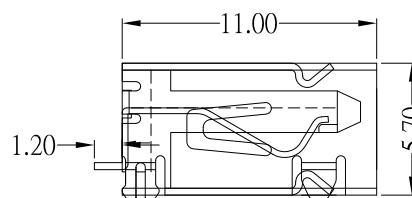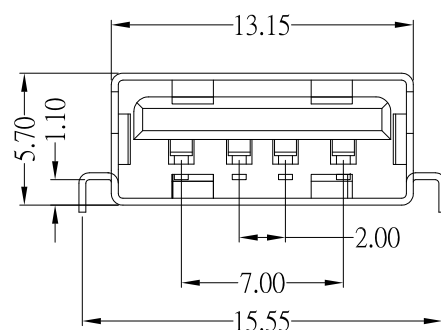

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE

Jack Lu 05/07/19

CHECKED BY: DATE

Jacky Chen 05/07/19

APPROVED BY: DATE

Tony Kao 05/07/19

MATL

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

USB AF SMT 無捲邊 沉板 H4.60mm

SUA-110E14Ax-x-S235

SUA-110E14Ax-x-S235

SIZE

A4

VER

R2