

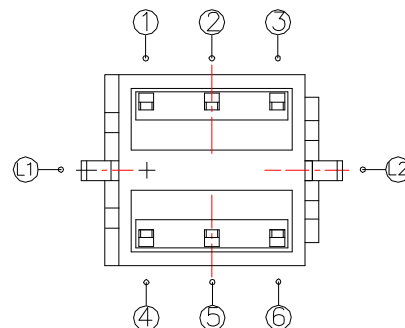





COLOR OF LED

0	Without	1	Red
2	Green	3	Orange
4	Yellow	7	Blue
8	White		

Technical drawing of a rectangular plate with 8 holes. The plate has a width of 10.16 and a height of 5.08. There are 8 holes, each with a diameter of 1.0 (8-Ø1.0). The holes are arranged in two rows of four. The center-to-center distance between the first and last hole in each row is 10.16. The distance from the center of the first hole to the left edge is 2.54, and the distance from the center of the last hole to the right edge is 2.54. A leader line points to one of the holes.

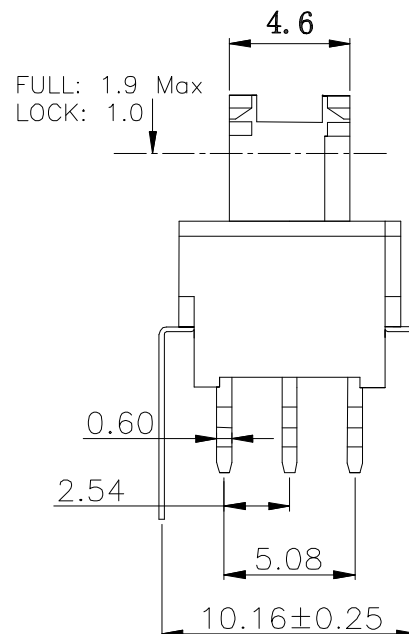

SPECIFICATIONS

Rating	DC 30V, 0.1A Max ; DC 5V, 0.1mA Max
Insulation Resistance	100M Ω Min.
Contact Resistance	70m Ω Max.
Operating Force	300 $\pm$ 100gf
Operating Life (cycles)	100,000
Operating Temperature	-20 $^{\circ}$ C ~ +70 $^{\circ}$ C

7	LED	1		
6	KNOB	1	POM	White
5	COVER	1	NYLON66	Black
4	CONTACT	2	PHOSPHOR BRONZE	Ag plated
3	SPRING	1	STEEL	Natural
2	CASE	1	NYLON66	Black
1	TERMINAL	2	BRASS	Ag Plated over Ni
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2
	Above 5 ~ 15	± 0.3
	Above 15 ~ 30	± 0.4
	Above 30 ~ 50	± 0.5
	Angle	± 0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	05/15/2012
CHECKED BY:	DATE
Jacky Chen	05/15/2012
APPROVED BY:	DATE
Tony Kao	05/15/2012

4	MAT'L		TITLE	SWITCH	
	FINISH		MODE	PUSH SWITCH WITH LED	
4	SCALE	1 : 1	DWG NO.	PS-x-613x-S313	SIZE A4
4	SHEET NO.	1 of 1	PART NO.	PS-x-613x-S313	VER P