
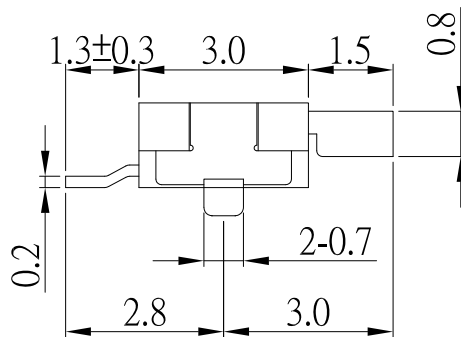
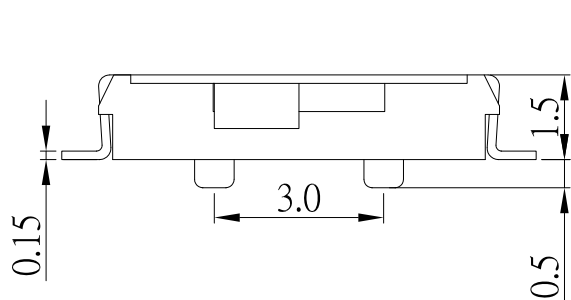
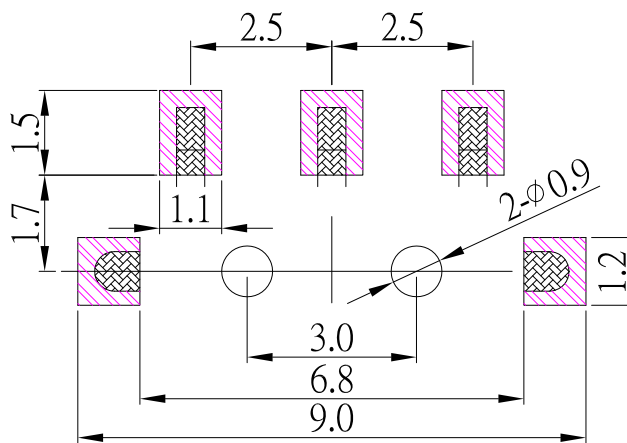


CIRCUIT DIAGRAM

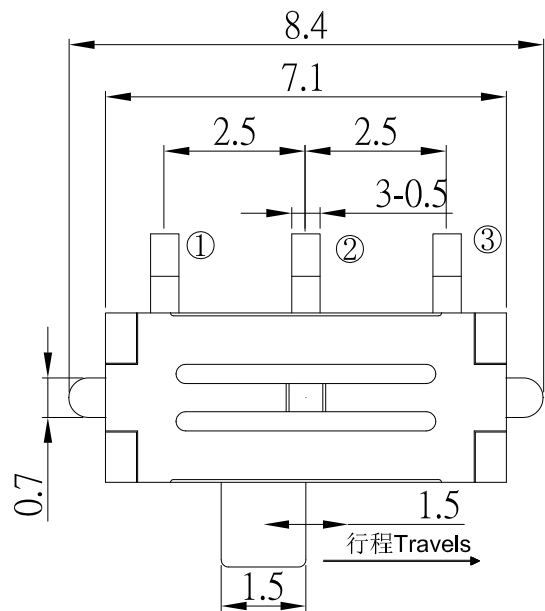

P.C.B LAND PATTERN

SPECIFICATIONS

Rating	DC 12V 0.1A
Contact Resistance	100mΩ Max
Insulation Resistance	100MΩ Min
Operating Force	160 ±50gf
Life	10,000 cycles
Operation temperature range	-40°C~85°C

E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated
D	CLIP	1	PHOSPHOR BRONZE	Ag plated
C	COVER	1	SUS	Ag plated
B	CASE	1	LCP	Black
A	SLIDER	1	PA46	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

5	新增Operation temperature range	Jack	121021
4	更新材質	Jack	091720
3	更新SLIDER的顏色	Jack	091620
2	更新圖面	Jack	060917
1	新增尺寸	Jack	052715
ITEM NO.	DESCRIPTION	DRAWN	DATE



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MATL	TITLE	SWITCH
Jack Lu	12/10/21			
CHECKED BY:	DATE	FINISH	MODLE	SLIDE SWITCH
Jacky Chen	12/10/21			
APPROVED BY:	DATE	SCALE	DWG NO.	SS-B00-S246
Tony Kao	12/10/21	1 : 1		
		SHEET NO.	PART NO.	SS-B00-S246
		1 of 1		
				SIZE A4
				VER R5