
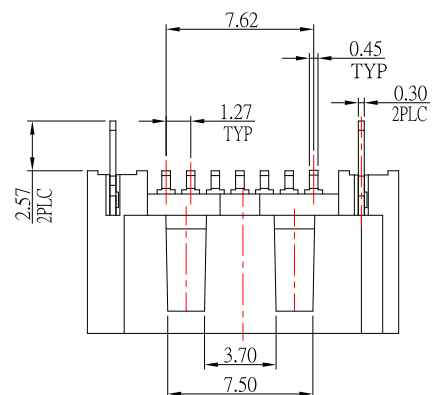


Increased CAP Drawing




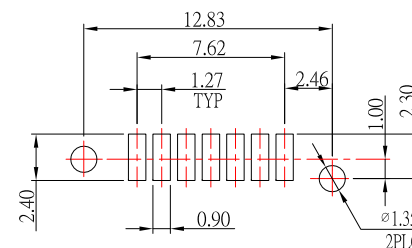


RECOMMENDED PCB LAYOUT

SATA-7B-84VS-x-S268

鍍層厚度:

|             |
|-------------|
| Blank : 1u" |
| 2 : 15u"    |
| 3 : 30u"    |

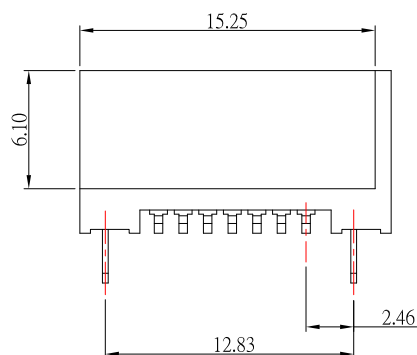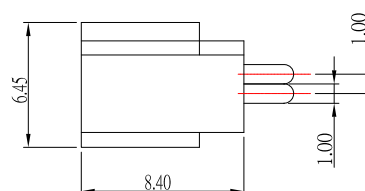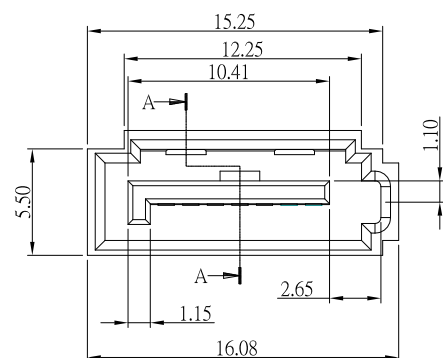

SECTION A-A

## SPECIFICATION:

### 1.MATERIAL:

Housing: LCP , Black.

Contact: BRASS

Board Lock: BRASS

### 2.Finish:

Contact: Plated Gold in Mating Area ;

Tin Plated on Solder Balls ;

Nickel under plated overall

Board Lock: Tin Plated on Solder Balls ;

Nickel under plated overall



建倚科技股份有限公司  
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS  
OTHERWISE STATED :

Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3

3RD.  
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu  
CHECKED BY: Jacky Chen  
APPROVED BY: Tony Kao

DATE: 04/02/18  
DATE: 04/02/18  
DATE: 04/02/18

MAT'L  
FINISH  
SCALE

TITLE  
MODLE  
DWG NO.

CONNECTOR  
SATA 7P B 型開槽全包接地片SMT  
SATA-7B-84VS-x-S268

SIZE  
A4  
VER  
A0

| ITEM NO. | DESCRIPTION | DRAWN | DATE   |
|----------|-------------|-------|--------|
| 1        | 更新為A0版      | Jack  | 040218 |