



P.C.B LAYOUT MOUNTING PATTERN

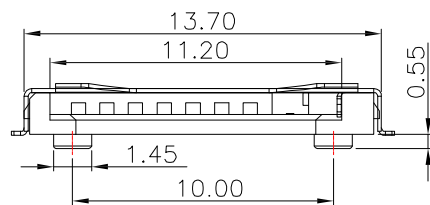

PIN NO.	PIN ASSIGNMENT
1#	DAT2
2#	CD/DAT3
3#	CMD
4#	VDD
5#	CLK
6#	VSS
7#	DAT0
8#	DAT1

- MATERIAL:
HOUSING: LCP
CONTACT: BRASS
SHIELDED: STAINLESS STEEL
- FINISH:
CONTACT: GOLD PLATING ON CONTACT AREA
PLATING ON SOLDER TAILS
NICKEL UNDERPLATING OVER ALL
SHIELDED: NICKEL UNDERPLATING OVER ALL
- PRODUCT SPECIFICATIONS:
CURRENT RATING: 0.5A
INSULATION RESISTANCE: 1000MΩ MIN
CONTACT RESISTANCE: 40mΩ MAX
WITHSTANDING VOLTAGE: 500 V AC/MIN
OPERATION TEMPERATURE: -20° TO +60°

CIRCUIT



CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S



UNITS MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 08/02/18
DATE: 08/02/18
DATE: 08/02/18

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	MICRO SD Card 8+2pin
SCALE	1 : 1	DWG NO.	SD-TF05-N5B10-S304
SHEET NO.	1 of 1	PART NO.	SD-TF05-N5B10-S304
		SIZE	A4
		VER	R2

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	更新尺寸標示	Jack	080218
1	更新圖面	Jack	050418