

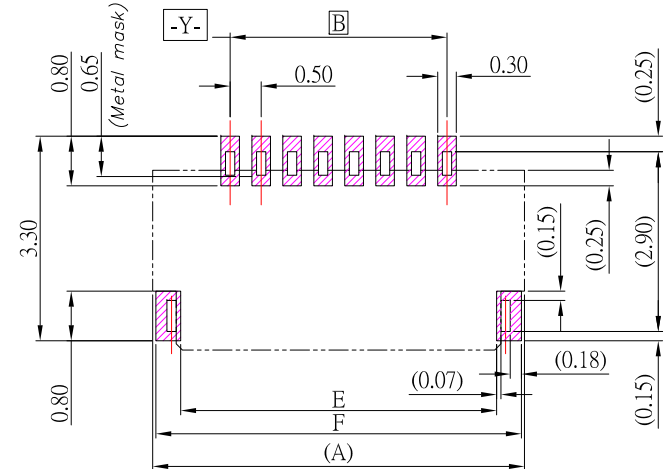
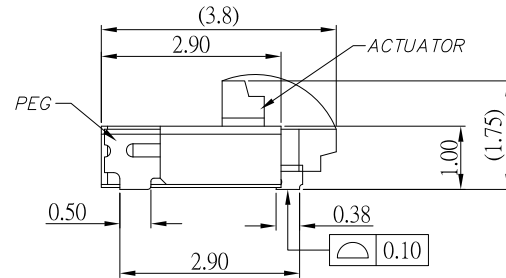
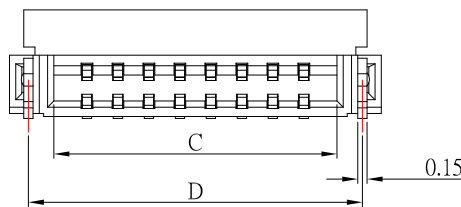


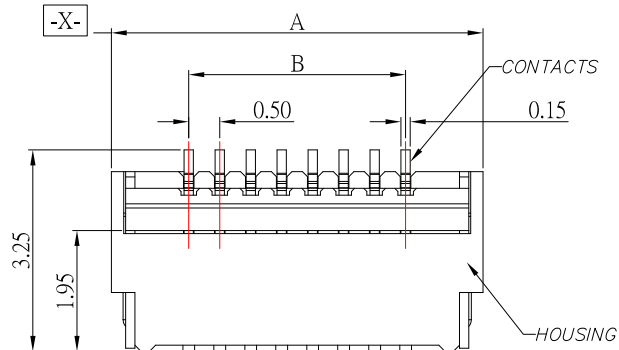

RECOMMEND PCB LAYOUT

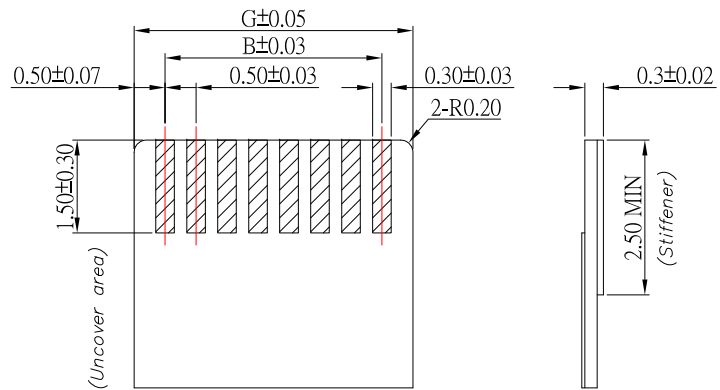

Applicable FPC

40	22.00	19.50	20.57	21.39	21.10	21.90	20.50
34	19.00	16.50	17.57	18.39	18.10	18.90	17.50
32	18.00	15.50	16.57	17.39	17.10	17.90	16.50
30	17.00	14.50	15.57	16.39	16.10	16.90	15.50
28	16.00	13.50	14.57	15.39	15.10	15.90	14.50
26	15.00	12.50	13.57	14.39	14.10	14.90	13.50
24	14.00	11.50	12.57	13.39	13.10	13.90	12.50
22	13.00	10.50	11.57	12.39	12.10	12.90	11.50
20	12.00	9.50	10.57	11.39	11.10	11.90	10.50
16	10.00	7.50	8.57	9.39	9.10	9.90	8.50
14	9.00	6.50	7.57	8.39	8.10	8.90	7.50
Number of Contacts	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G

NOTES:

- MATERIAL:
 - HOUSING: LCP
 - ACTUATOR: LCP
 - CONTACT: PHOSPHOR BRONZE
 - PEG: BRASS
- PLATING:
 - CONTACT: GOLD PLATED ON NICKEL OVERALL
 - LEG: TIN PLATED ON NICKEL OVERALL
- RATING:
 - CURRENT RATING: 0.5A AC/DC
 - VOLTAGE RATING: 50V AC/DC
 - TEMPERATURE RANGE: -55°C~+85°C

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	06/21/21	FINISH	MODLE	0.5FPC H1.0 後掀式 14PIN以上 0.3 CABLE
CHECKED BY:	DATE	SCALE	DWG NO.	FPC05L3-10xx-C3-S304
Jacky Chen	06/21/21	1 : 1	PART NO.	FPC05L3-10xx-C3-S304
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	06/21/21			