

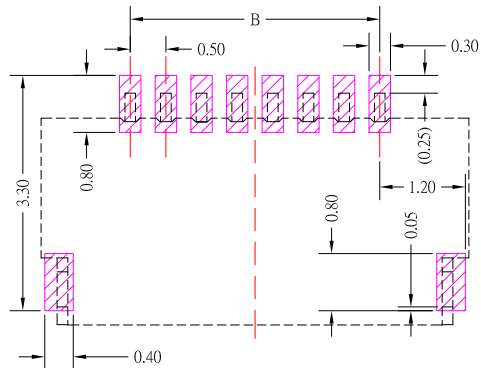
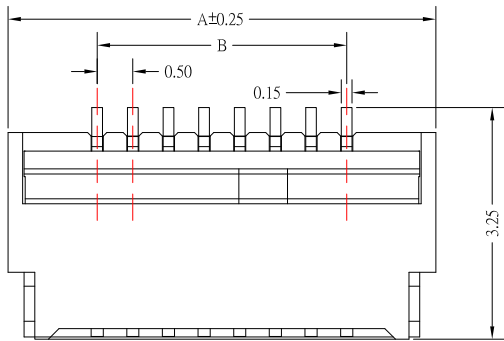
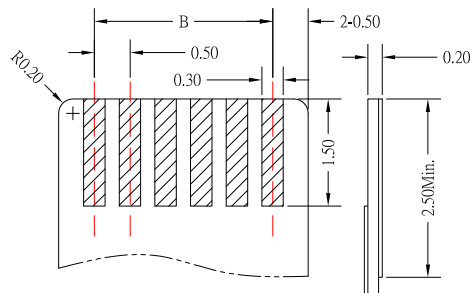
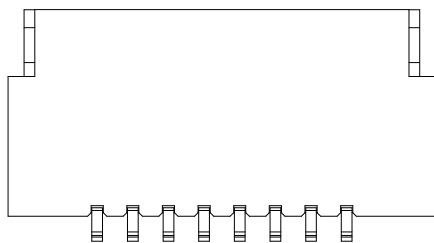


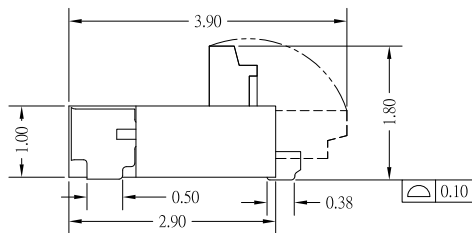

RECOMMENDED PCB LAYOUT

Dimensional Information			
Part No.	Dimensions		
	A	B	C
4P	4.00	1.50	2.57
6P	5.00	2.50	3.57
8P	6.00	3.50	4.57

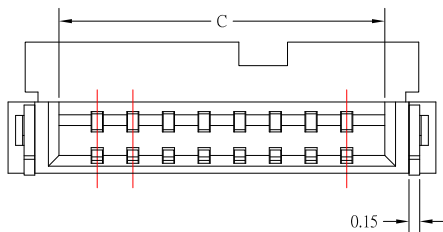

APPLICABLE FFC/FPC

Note:

1.Material

1.1: Housing: LCP, UL94-V0

1.2: Actuator: LCP, UL94-V0

1.3: Contact: Phosphor Bronze.

1.4: LEG: Phosphor Bronze.

2.Plating

2.1: Contact: Gold Plating

2.2: LEG: Matte Tin Plating Over Nickel.

3.Rating:

3.1: Operating Voltage: 50V AC/DC.

3.2: Current Rating: 0.4A AC/DC.

3.3: Contact Resistance: 30mΩ Max

3.4: Insulation Resistance: 100MΩ Min

3.5: Operating Temperature: -55°C~+85°C.



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:
Jack Lu

DATE
01/10/19

CHECKED BY:
Jacky Chen

DATE
01/10/19

APPROVED BY:
Tony Kao

DATE
01/10/19

MATL

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

0.5 FPC H:1.0 後掀式 0.2 CABLE 藍色蓋

FPC05L2-10xx-C3-S304

FPC05L2-10xx-C3-S304

SIZE

A4

VER

R4