



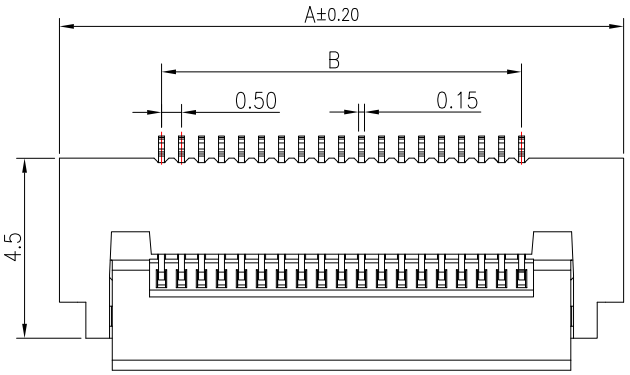





COVER OPEN STATE



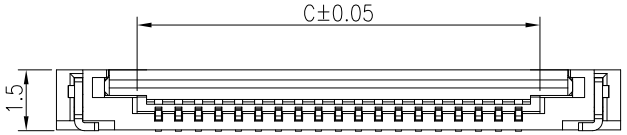







CABLE INSERT DIM.

PIN数	A	B	C
12	10.60	5.50	6.58
15	12.10	7.00	8.07
20	14.60	9.50	10.57
24	16.60	11.50	12.57
26	17.60	12.50	13.57

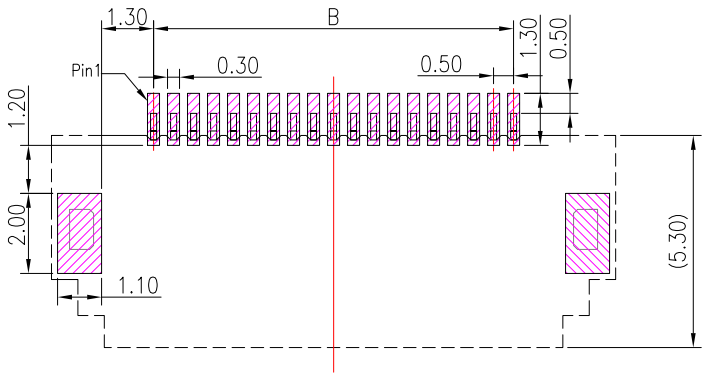

PCB LAYOUT

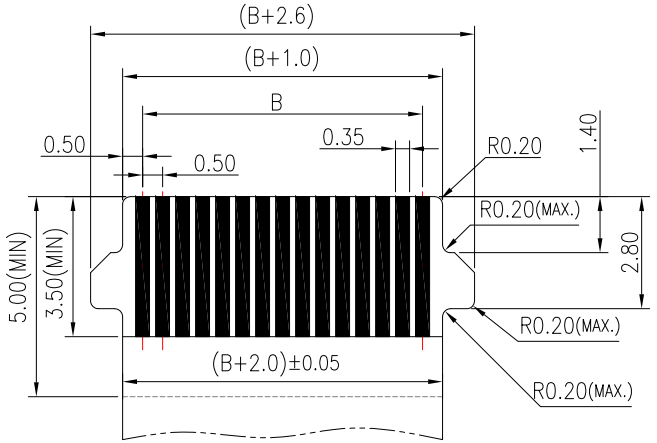

APPLICABLE FPC/FFC

NOTES:

1. MATERIAL:
   - 1.1 HOUSING: HIGHT-TEMP PLASTIC,COLOR:BEIGE
   - 1.2 ACTUATOR: HIGHT-TEMP PLASTIC,COLOR:BLACK
   - 1.3 CONTACT: COPPER ALLOY
   - 1.4 FITTING NAIL: COPPER ALLOY
2. PLATING:
   - 2.1 CONTACT: GOLD / TIN PLATED ON NICKEL OVERALL
   - 2.2 LEG: TIN PLATED ON NICKEL OVERALL

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	新增PIN數選項	Jack	091521

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S | UNITS | MM

DRAWN BY: Jack Lu	DATE 09/15/21	MAT'L	
CHECKED BY: Jacky Chen	DATE 09/15/21	FINISH	
APPROVED BY: Tony Kao	DATE 09/15/21	SCALE	1 : 1
		SHEET NO.	1 of 1

TITLE	CONNECTOR		
MODLE	FPC 0.5mm 掀蓋式 蝴蝶扣		
DWG NO.	FPC05L-15xx-B2-S304	SIZE	A4
PART NO.	FPC05L-15xx-B2-S304	VER	R1