


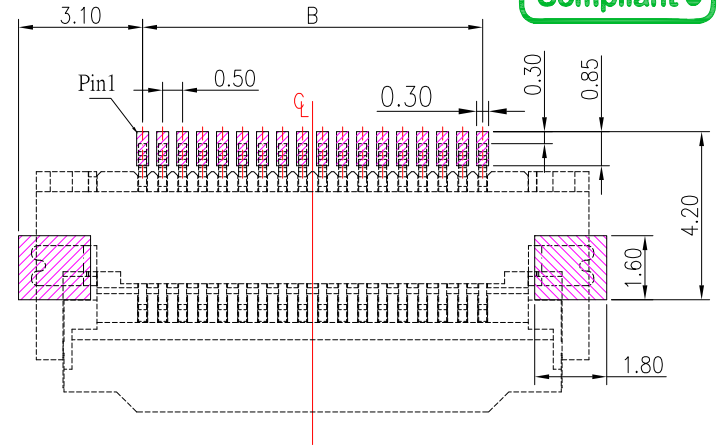

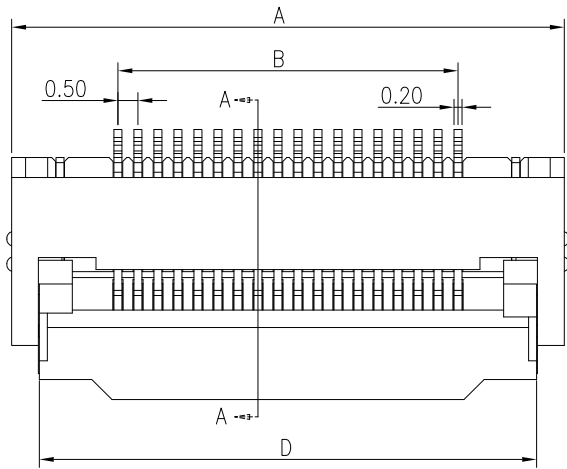





PCB LAYOUT

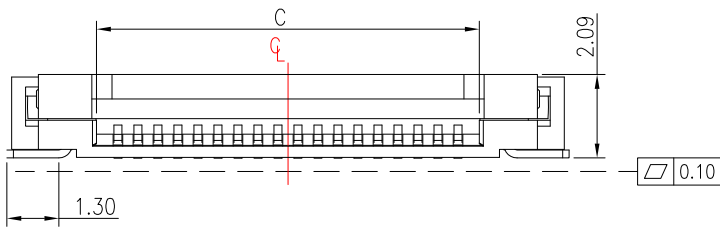

COVER OPEN STATE

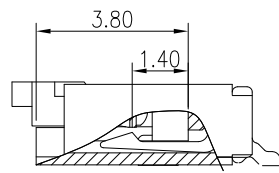

CABLE INSERT DIM.
SECTION: A-A

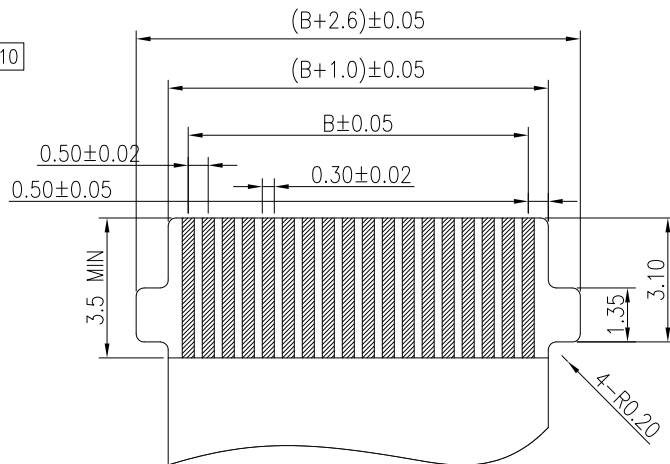

RECOMMENDED FFC SIZE
THICKNESS 0.3±0.03

PIN	Dimensions			
	A	B	C	D
15	12.31	7.00	8.07	10.93
17	13.31	8.00	9.07	11.93
18	13.81	8.50	9.57	12.43
22	15.81	10.50	11.57	14.43
25	17.31	12.00	13.07	15.93
28	18.81	13.50	14.57	17.43
30	19.81	14.50	15.57	18.43
32	20.81	15.50	16.57	19.43
36	22.81	17.50	18.57	21.43
40	24.81	19.50	20.57	23.43
54	31.81	26.50	27.57	30.43

- NOTES:
- MATERIAL:
 - HOUSING: LCP,COLOR:BEIGE
 - ACTUATOR: LCP,COLOR:BLACK
 - CONTACT: PHOSPHOR BRONZE
 - FITTING NAIL: BRASS
 - PLATING:
 - CONTACT: GOLD / TIN PLATED ON NICKEL OVERALL
 - FITTING NAIL: TIN PLATED ON NICKEL OVERALL

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	06/16/23			
CHECKED BY:	DATE	FINISH	MODLE	FPC 0.5mm 掀蓋式 蝴蝶扣
Jacky Chen	06/16/23			
APPROVED BY:	DATE	SCALE	DWG NO.	FPC05L-20xx-B2-S304
Tony Kao	06/16/23	1 : 1		
		SHEET NO.	PART NO.	FPC05L-20xx-B2-S304