

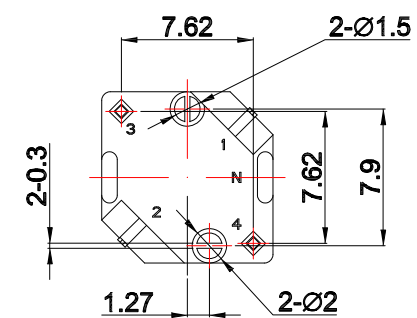
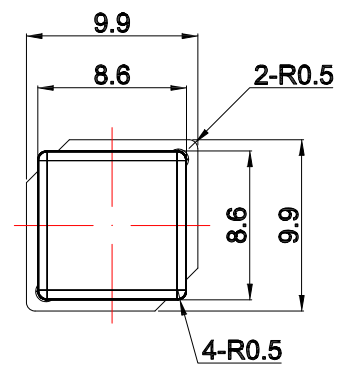


P.C.B LAYOUT

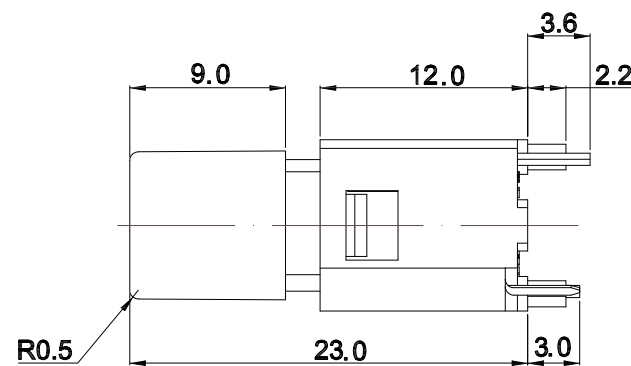

SPECIFICATIONS

Rating	DC 20V 1mA
Contact Resistance	200 mΩ Max.
Insulation Resistance	100 MΩ Min.
Operating Temperature	-40°C ~ +85°C
Operating Force	125 ± 35gf
Operating Life (cycles)	300,000

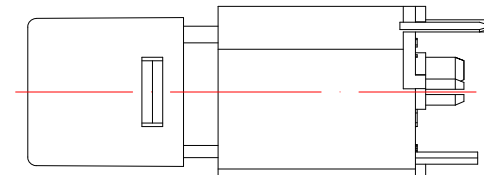

TS-H3-xx-C0xx-S065

COLOR OF LED


0	Without	1	Red
2	Green	3	Orange
4	Yellow	7	Blue
8	White		

CAP Color

0	Without	1	Red
2	Green	3	Yellow
4	Ivory	5	Gray
6	Black	8	White

CAP MODEL

S1	6.0mm Sq
S2	8.6mm Sq
S2A	8.6mm Sq
S3	11.0mm Sq
S3A	12.5mm Sq
S4	11.0mm Sq



SCHEMATIC



TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	--------------	-------	----

DRAWN BY:	Jack Lu	DATE	02/09/18	MAT'L		TITLE	SWITCH
CHECKED BY:	Jacky Chen	DATE	02/09/18	FINISH		MODLE	TACT SWITCH W/I LED
APPROVED BY:	Tony Kao	DATE	02/09/18	SCALE	1 : 1	DWG NO.	TS-H3-xx-C0xx-S065
				SHEET NO.	1 of 1	PART NO.	TS-H3-xx-C0xx-S065

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------