





TS-H5-xx-Sx-S065

COLOR OF LED





0	Without	1	Red
2	Green	3	Orange
4	Yellow	7	Blue
8	White		

CAP Color

0	Without	1	Red
2	Green	3	Yellow
4	Ivory	5	Gray
6	Black	8	White

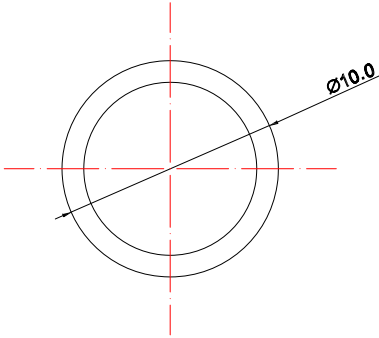


P.C.B LAYOUT

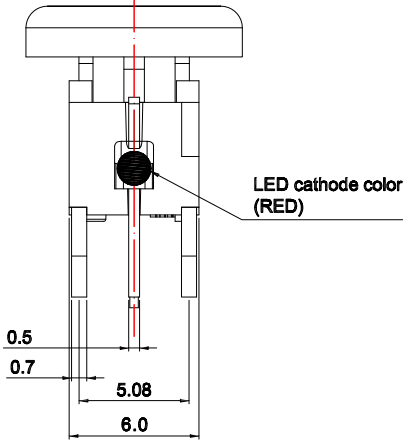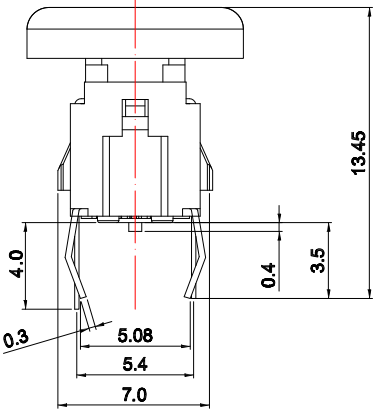

SCHEMATIC

SPECIFICATIONS

Rating	DC 12V, 50mA
Contact Resistance	100 mΩ Max.
Insulation Resistance	100 MΩ Min.
Operating Temperature	-40°C ~ +85°C
Operating Force	180 ± 50gf
Operating Life (cycles)	500,000

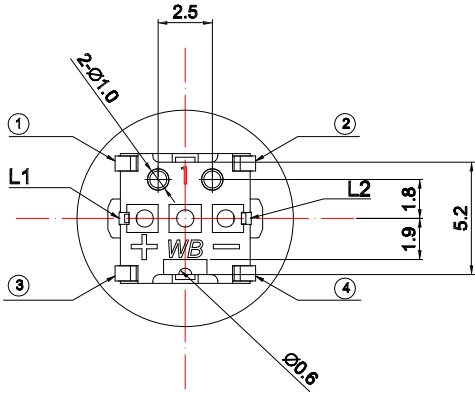

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 07/02/19
DATE: 07/02/19
DATE: 07/02/19

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO. 1 of 1

TITLE: SWITCH
MODLE
DWG NO.
PART NO.

TS-H5-xx-Sx-S065
TACT SWITCH W/I LED
TS-H5-xx-Sx-S065

SIZE: A4
VER: R1