



SBC-240VSE5-31x-S277

鍍層厚度：

Blank : 1u"
2 : 15u"
3 : 30u"

SPECIFICATIONS

Electrical:

- 1.Dielectric Withstand Voltage: 100V AC
- 2.Contact Resistance: 40 mΩ Max
- 3.Insulation Resistance: 100 MΩ Min

Mechanical:







- 1.Connector Mate and Unmate Force
 - 1.1 Mate force: 5~20 N
 - 1.2 Unmate force: 8~20 N

Material:

- 1.Housing: LCP
- 2.Contact: Copper Alloy
- 3.Shell: SUS

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

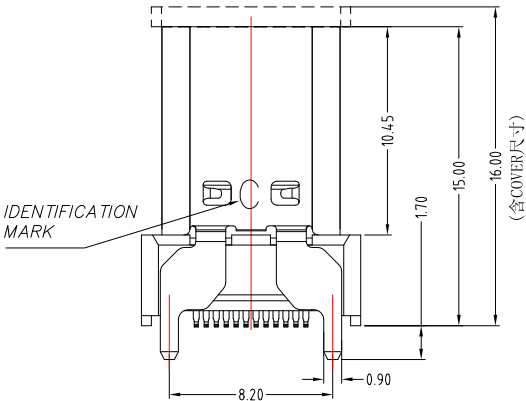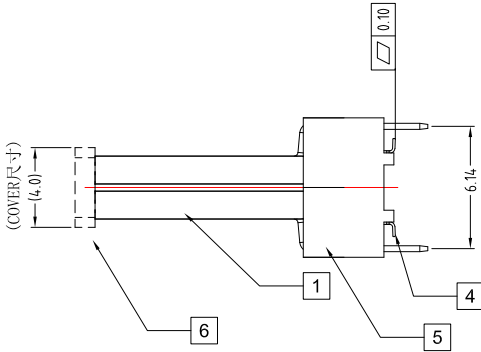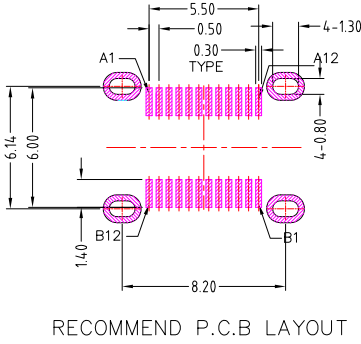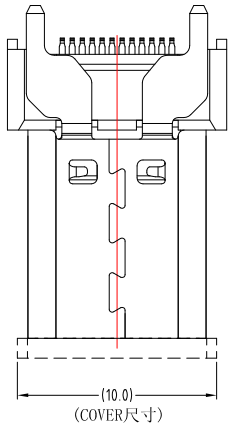

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

2	更新樣式	Jack	012821
1	更新材質表	Jack	121620
ITEM NO.	DESCRIPTION	DRAWN	DATE

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MATL		TITLE	CONNECTOR
Jack Lu	01/28/21	FINISH		MODLE	TYPE C FEMALE VERTICAL H:15.0mm SMT TYPE
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	SBC-240VSE5-31x-S277
Jacky Chen	01/28/21	SHEET NO.	1 of 1	PART NO.	SBC-240VSE5-31x-S277
APPROVED BY:	DATE				
Tony Kao	01/28/21				