

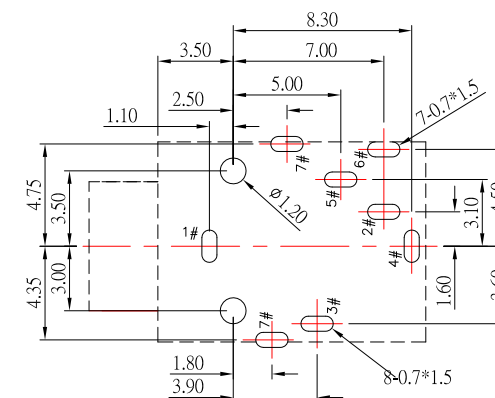
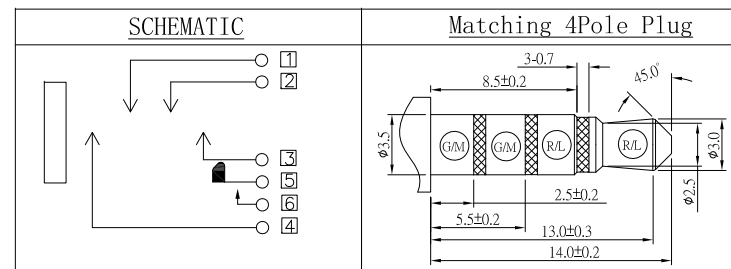

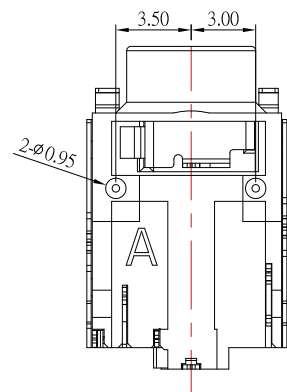



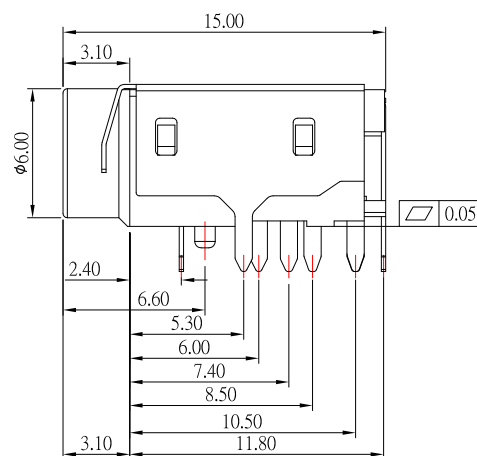

P.C.B LAYOUT
TOP VIEW

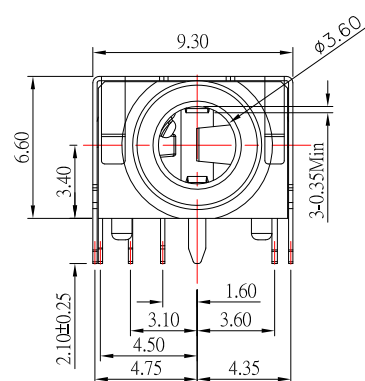

SPECIFICATION

- 1.Rating : DC 30V, 0.5A
- 2.Contact resistance : $\leq 30\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

9	HOUSING	1	PA9T	Black
8	INSULATOR	1	PA9T	Black
7	SHELL	1	SUS	NI-Plating, Solder for Terminal Su
6	TERMINAL-6	1	COPPER ALLOY	Matte Sn-Plating
5	TERMINAL-5	1	COPPER ALLOY	Matte Sn-Plating
4	TERMINAL-4	1	COPPER ALLOY	Matte Sn-Plating
3	TERMINAL-3	1	COPPER ALLOY	Matte Sn-Plating
2	TERMINAL-2	1	COPPER ALLOY	Matte Sn-Plating
1	TERMINAL-1	1	COPPER ALLOY	Matte Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DRAWN BY:	DATE	MAT'L		TITLE	JACK	
Jack Lu	02/21/20					
CHECKED BY:	DATE	FINISH		MODLE	3.5 PHONE JACK	
Jacky Chen	02/21/20					
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	PJ-D3035C-S214	SIZE
Tony Kao	02/21/20					A4
		SHEET NO.	1 of 1	PART NO.	PJ-D3035C-S214	VER
						R

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2
	Above 5 ~ 15	± 0.3
	Above 15 ~ 30	± 0.4
	Above 30 ~ 50	± 0.5
	Angle	± 0.3°

3RD.



UNITS

MM

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------