


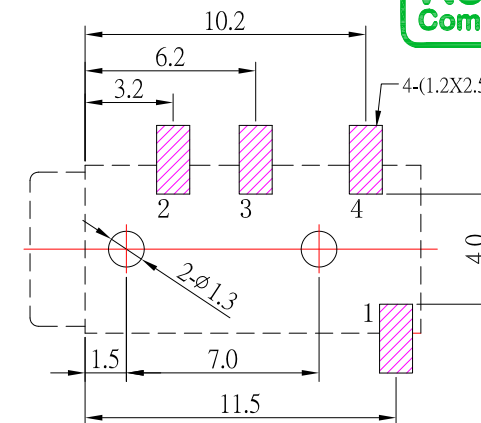
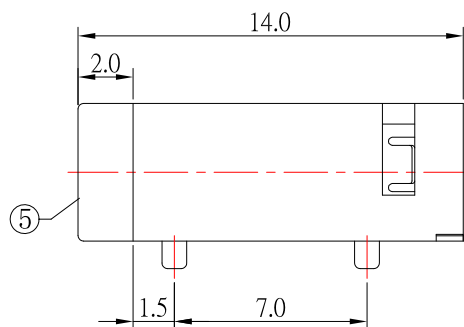
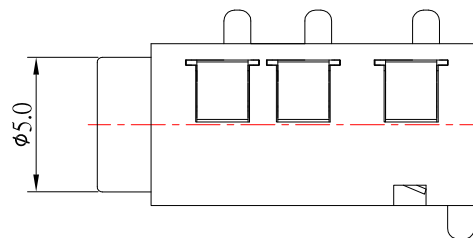




P.C.B LAYOUT
TOP VIEW

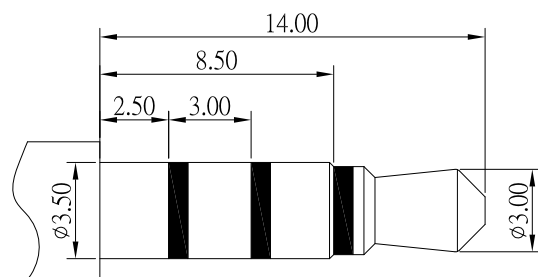


φ3.50mm 4 POLE PLUG

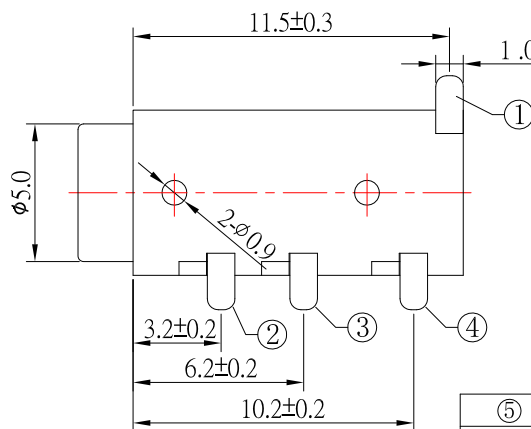

SCHEMATIC

PJ-S3020DS



SPECIFICATIONS

- Rating : DC 30V, 1.0A ;
- Contact resistance : $\leq 30\text{m}\Omega$;
- Insulation resistance : $\geq 100\text{M}\Omega$;
- Withstand voltage : 500VAC ;
- Insertion and extraction force : 3-20N;
- life test : 5,000 cycles °

7	更新鍍層	Jack	101521
6	更新材質	Jack	091421
5	新增上視圖	Jack	040119
4	更新樣式及尺寸	Jack	032819
3	更新PLUG尺寸	Jack	050918
2	更新圖面	Jack	080317
1	更新材質	Jack	080117
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	--------------	-------	----

⑤	HOUSING	1	LCP	
④	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
③	3#CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
②	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
①	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
DRAWN BY:	DATE	MATL	TITLE	JACK
Jack Lu	10/15/21			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	10/15/21			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-S3020DS-S124
Tony Kao	10/15/21	1 : 1		
		SHEET NO.	PART NO.	PJ-S3020DS-S124
		1 of 1		
				SIZE A4
				VER R7