
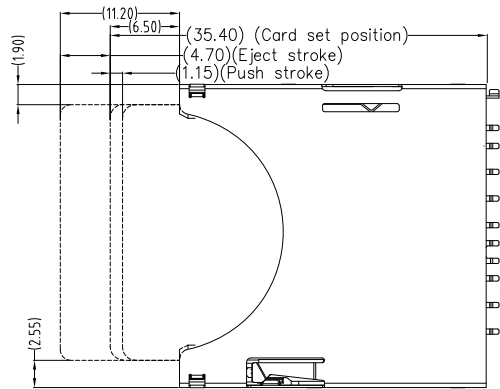
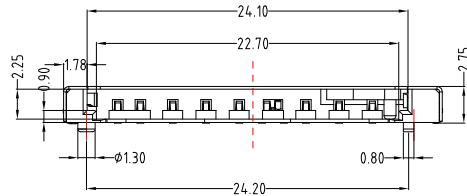
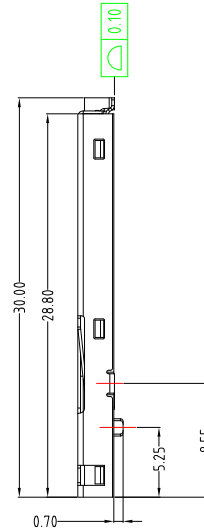


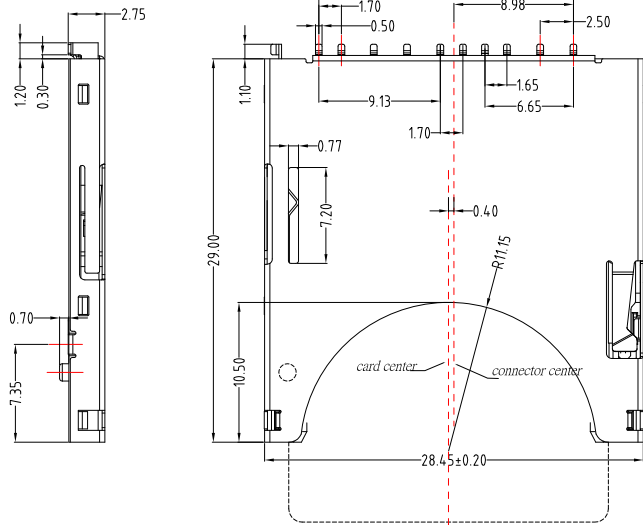

| Pin No. |                     | SD | MMC |
|---------|---------------------|----|-----|
| P1      | MMC-DAT<br>SD-DAT3  | 1P | 7P  |
| P2      | MMC-CMD<br>SD-CMD   | 2P | 2P  |
| P3      | MMC-VSS1<br>SD-VSS1 | 3P | 3P  |
| P4      | MMC-VDD<br>SD-VDD   | 4P | 4P  |
| P5      | MMC-CLK<br>SD-CLK   | 5P | 5P  |
| P6      | MMC-VSS2<br>SD-VSS2 | 6P | 6P  |
| P7      | MMC-DAT<br>SD-DAT0  | 7P | 1P  |
| P8      | SD-DAT1             | 8P |     |
| P9      | SD-DAT2             | 9P |     |


### SPECIFICATION

#### Electrical :


- Current Rating: 0.5mA AC / DC Max
- Voltage Rating: 125V AC / DC
- Contact Resistance: 100 mΩ Max.
- Insulation Resistance: 1,000 MΩ Min.

#### Environmental:

- Operating Temperature: -20°C ~ +90°C.

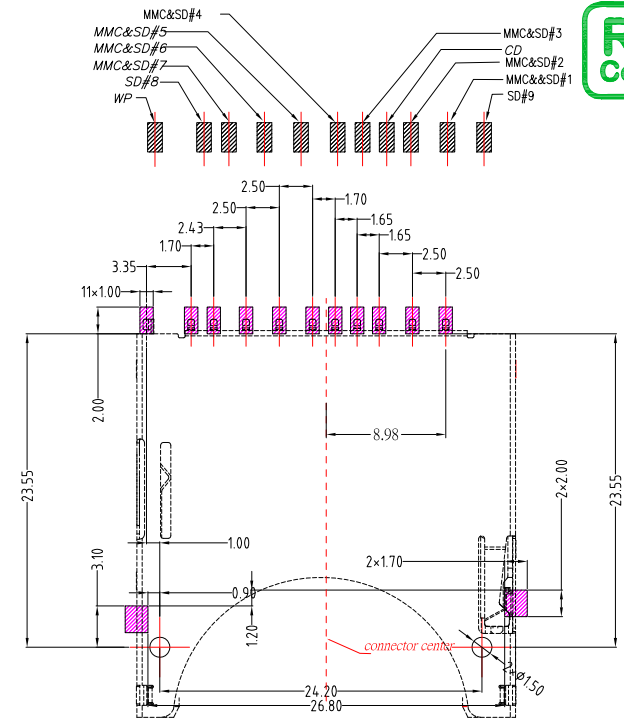

PCB LAYOUT



#### Material:

- Housing: LCP,Black
- Contact: Phosphor Bronze
- Shell: SUS

#### Finish:

- Contact: Plated Gold in Mating Area ;  
Tin Plated on Solder Balls ;  
Nickel under plated overall
- Shell: Nickel under Plated surface layer



建倚科技股份有限公司  
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS  
OTHERWISE STATED :

Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3

3RD.  
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu  
CHECKED BY: Jacky Chen  
APPROVED BY: Tony Kao

DATE: 06/24/19  
DATE: 06/24/19  
DATE: 06/24/19

MAT'L  
FINISH  
SCALE: 1 : 1  
SHEET NO. 1 of 1

TITLE  
MODLE  
DWG NO.  
PART NO.

CONNECTOR  
CARD CONNECTOR  
SD-001-001-S267  
SD-001-001-S267

SIZE  
VER

A4  
R2

| ITEM NO | DESCRIPTION | DRAWN | DATE   |
|---------|-------------|-------|--------|
| 2       | 更新圖面        | Jack  | 062419 |
| 1       | 更新圖面        | Jack  | 081018 |