


SBC-240S4-32x-S242

鍍層厚度:

Blank : 1u"
2 : 15u"
3 : 30u"

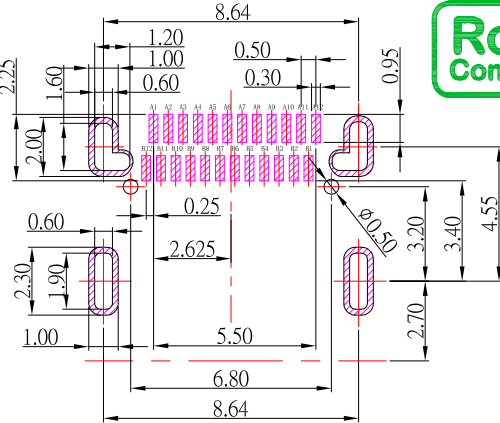

P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATIONS

Electrical:

- 1.Rating: 3.0 A
- 2.Dielectric Withstand Voltage: 100V AC
- 3.Contact Resistance: 40 mΩ Max
- 4.Insulation Resistance: 100 MΩ Min

Mechanical:

- 1.Connector Mate and Unmate Force
 - 1.1 Mate force: 5~20 N
 - 1.2 Unmate force: 8~20 N

Material:

- 1.Housing: LCP
- 2.Contact: Copper Alloy
- 3.Shell: SUS

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°
3RD. ANGEL'S
UNITS MM

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	11/09/22	FINISH		MODLE	TYPE CF 雙排 SMT 有柱 GEN 2
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	SBC-240S4-32x-S242
Jacky Chen	11/09/22	SHEET NO.	1 of 1	PART NO.	SBC-240S4-32x-S242
APPROVED BY:	DATE				
Tony Kao	11/09/22				

1	新增PCBLAYOUT尺寸	Jack	110922
ITEM NO.	DESCRIPTION	DRAWN	DATE