



SS-G24S-x-S246


SLIDER COLOR :

Black : B



White : W

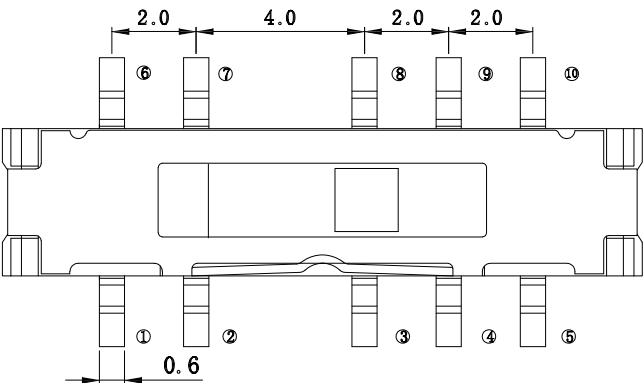

CIRCUIT DIAGRAM

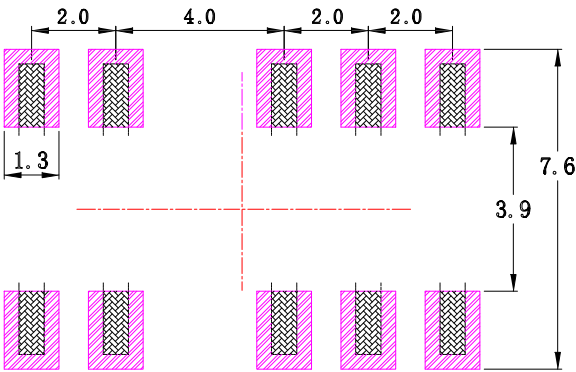

P.C.B LAYOUT

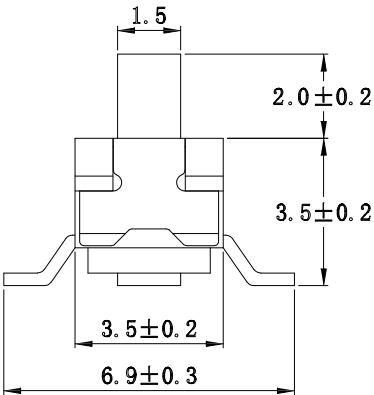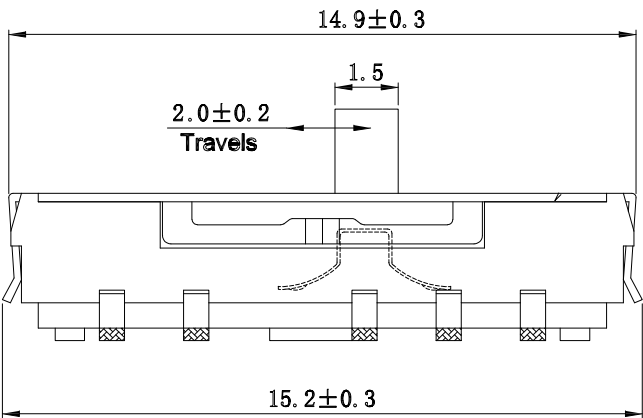

SPECIFICATIONS

Rating	100mA , 12V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	230 ± 70gf
Operating Life	10,000 cycles

E	TERMINAL	10	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	PHOSPHOR BRONZE	Ag plated
C	COVER	1	SUS	
B	BASE	1	LCP	Black
A	SLIDER	1	PA46	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

2	新增SPEC和材質表	Jack	081325
1	新增尺寸	Jack	110620
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT

建倚科技股份有限公司

CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 30 ±0.3
Above 30 ~ 50 ±0.4
Above 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	08/13/25	FINISH	MODLE	SLIDE SWITCH 180度 2P4T SMT
CHECKED BY:	DATE	SCALE	DWG NO.	SS-G24S-x-S246
Jacky Chen	08/13/25	1 : 1	PART NO.	SS-G24S-x-S246
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	08/13/25			