
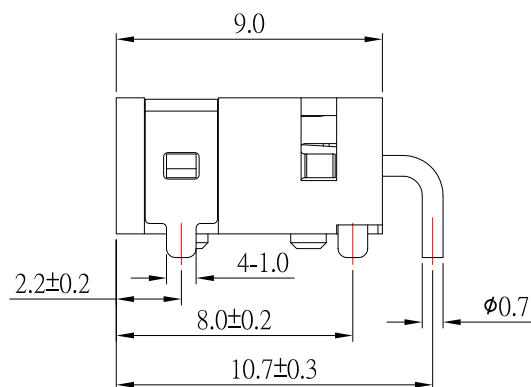
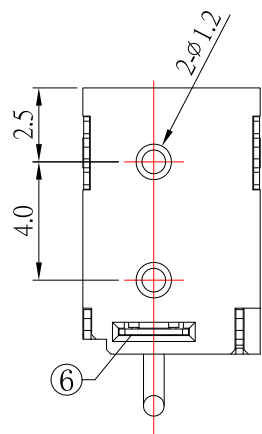
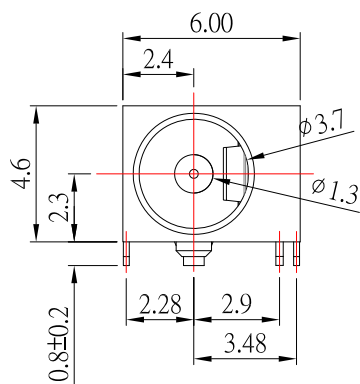



RECOMMENDED PLUG

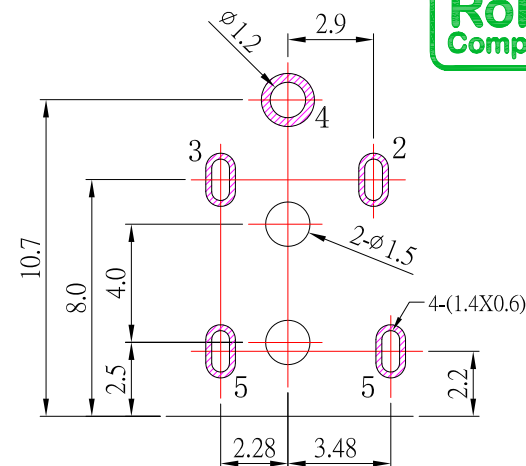

P.C.B LAYOUT
TOP VIEW

SPECIFICATION

- 1.Rating : DC 12V, 3.0A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles °

MODEL NO.	DC-S060-1.3
SCHEMATIC	

⑥	STOPPER	1	SUS	N/A
⑤	CONTACT FOOT	1	BRASS	Ag-Plating
④	PIN	1	BRASS	Ni-Plating
③	CURVE PIECE	1	BRASS	Ag-Plating
②	SPRING	1	PHOSPHOR BRONZE	Ag-Plating
①	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DRAWN BY:	DATE	MAT'L		TITLE	JACK	
Jack Lu	07/17/23					
CHECKED BY:	DATE	FINISH		MODLE	DC JACK	
Jacky Chen	07/17/23	SCALE	1 : 1	DWG NO.	DC-S060-1.3-S124	SIZE A4
APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	DC-S060-1.3-S124	VER R3
Tony Kao	07/17/23					

7			
	3	更新尺寸	Jack 071723
	2	更新PCB LAYOUT尺寸	Jack 081222
	1	更新圖面樣式及鍍層	Jack 121119
	ITEM NO	DESCRIPTION	DRAWN DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2	3RD. ANGEL'S		UNITS	MM
	Above 5 ~ 15	± 0.3				
	Above 15 ~ 30	± 0.4				
	Above 30 ~ 50	± 0.5				
	Angle	$\pm 0.3^\circ$				