


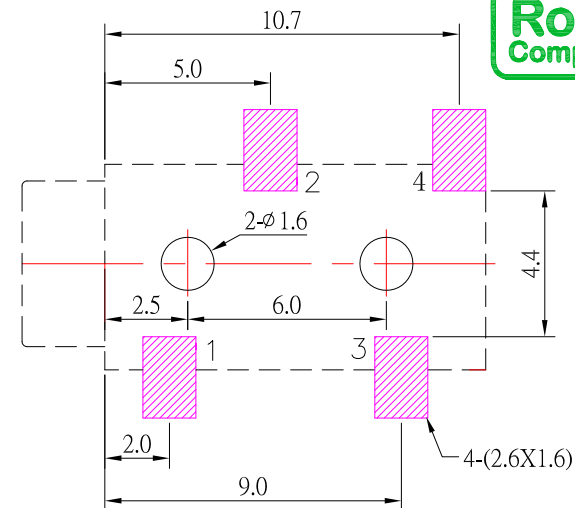
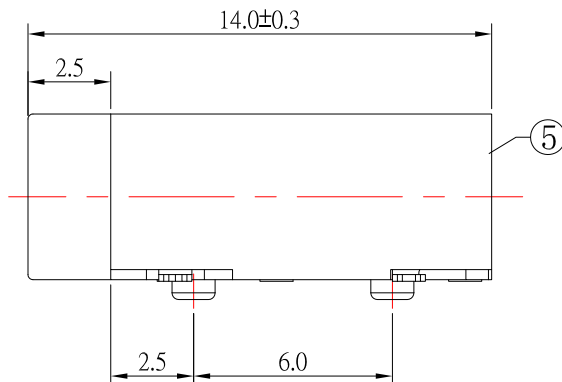
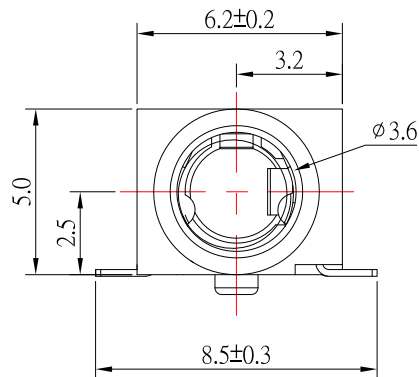


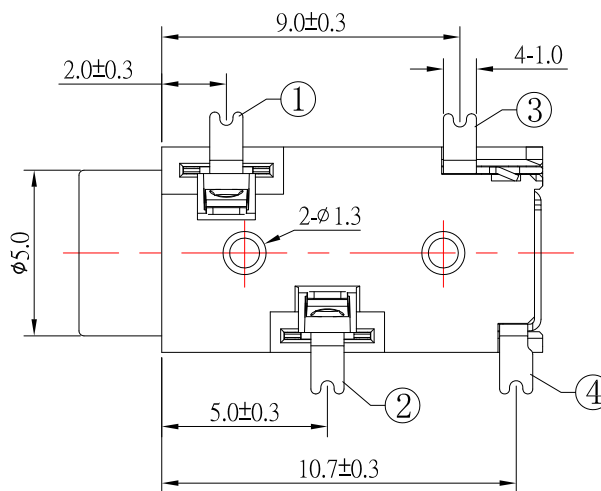

P.C.B LAYOUT
TOP VIEW

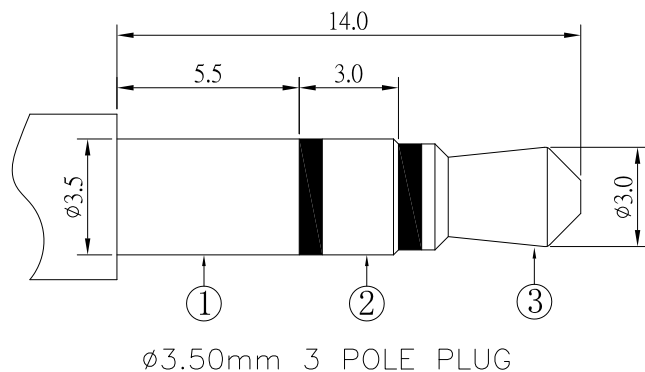

SCHEMATIC



SPECIFICATION

- Rating : DC 30V , 1.0A ;
- Contact resistance : $\leq 30\text{m}\Omega$;
- Insulation resistance : $\geq 100\text{M}\Omega$;
- Withstand voltage : 500VAC ;
- Insertion and extraction force : 3-30N;
- life test : 5,000 cycles °

⑤	HOUSING	1	PA9T	
④	CURVE PIECE	1	BRASS	Sn-Plating
③	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
②	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
①	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
No	PART NAME	QTY	MATERIAL	REMARK

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	09/19/22		MODLE	PHONE JACK
CHECKED BY:	DATE	FINISH		
Jacky Chen	09/19/22	SCALE	1 : 1	DWG NO. PJ-S3127C-S124
APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO. PJ-S3127C-S124
Tony Kao	09/19/22			