

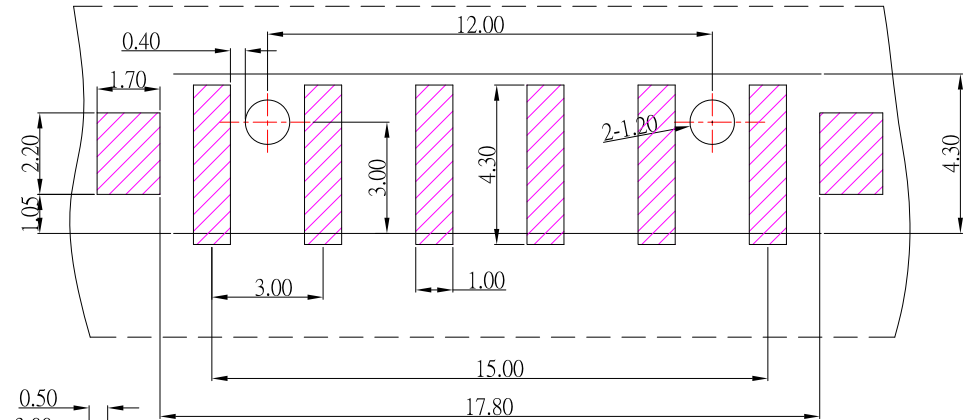
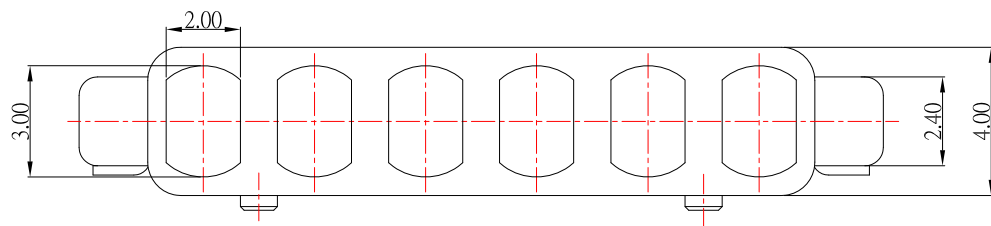
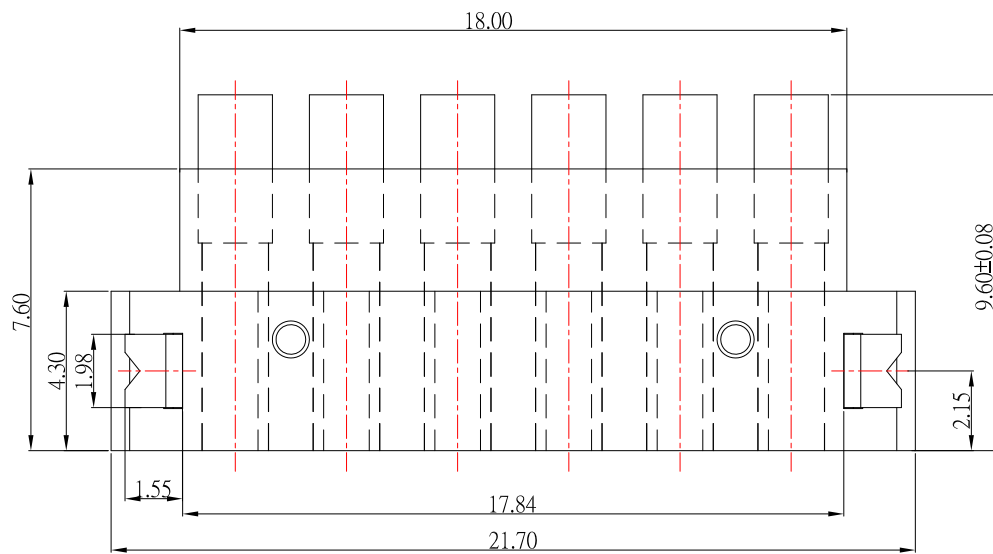


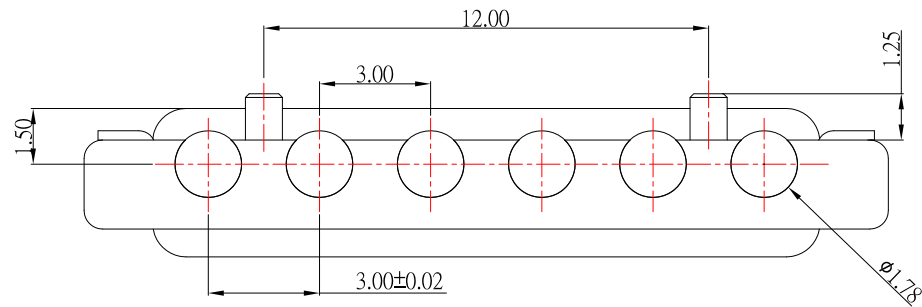

RECOMMEND PCB LAYOUT

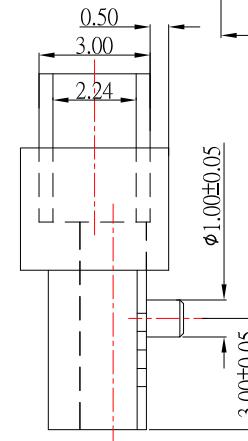

NOTE

- 1.Material
Brass
- 2.Plating
Au over NI
- 3.Electrical
Rated current & voltage: DC 12V; 1.0A Max.
- 4.To ensure the best usage, please operate it based on the working height Based on the engineering drawings, shall not exceed the maximum allowed compression
- 5.To avoid arcing issue, The adaptor start to power supply after connector mated fully.

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

12/28/17

CHECKED BY:

Jacky Chen

DATE

12/28/17

APPROVED BY:

Tony Kao

DATE

12/28/17

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

POGO PIN

PGC-3096-6P-S353

PGC-3096-6P-S353

SIZE

A4

VER

R2

ITEM NO.

DESCRIPTION

DRAWN

DATE

Jack

122817

Jack

122717