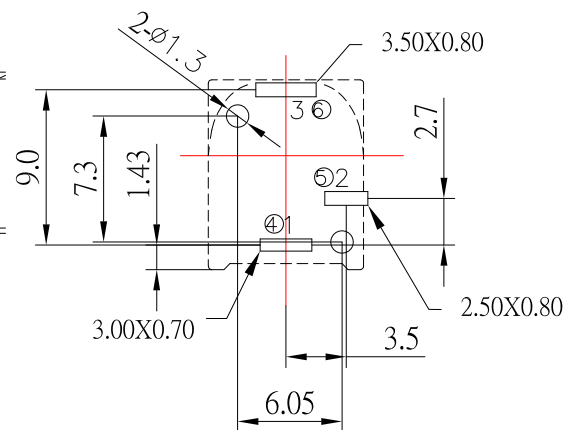
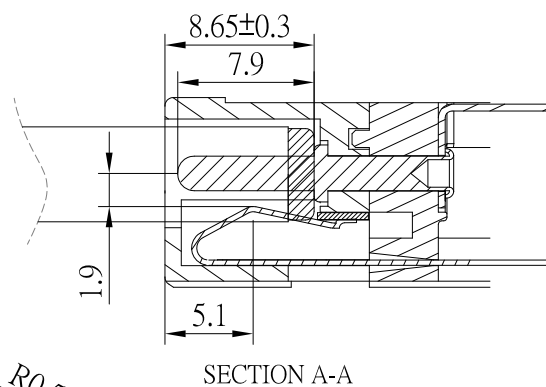
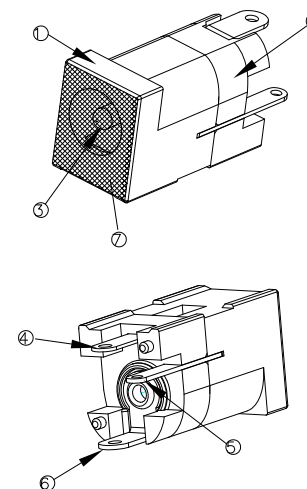
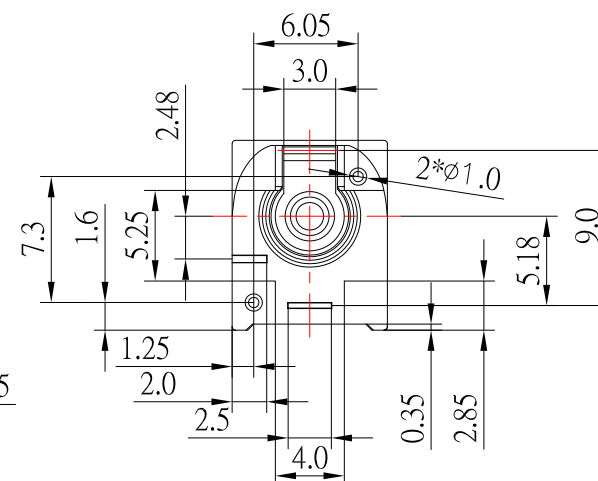
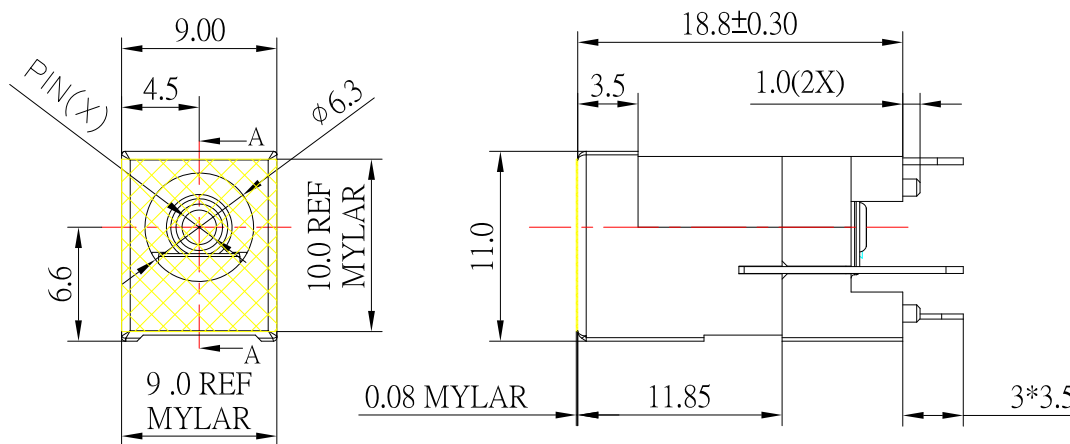


MODEL NO.	DC-D0239CH-x
SCHEMATIC	
CENTER PIN(X)	φ1.30 mm
	φ2.00 mm
	φ2.50mm

SPECIFICATION

- Rating : DC 18V, 4.0A ;
- Contact resistance : ≤50mΩ ;
- Insulation resistance : ≥100MΩ ;
- Withstand voltage : 500VAC ;
- Insertion and extraction force : 3-30N;
- life test : 5,000 cycles °

7	MYLAR	1		
6	PIN TERMINAL	1	BRASS	Ti Plated over Ni
5	SHUNT TERMINAL	1	BRASS	Ti Plated over Ni
4	SPRING TERMINAL	1	BRASS	Ti Plated over Ni
3	CENTER PIN	1	COPPER	Ni-Plating
2	BOTTOM COVER	1	PA9T(Black)	
1	HOUSING	1	LCP(Black)	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	05/13/19			
CHECKED BY:	DATE	FINISH	MODLE	DC JACK 高溫料 貼MYLAR
Jacky Chen	05/13/19			
APPROVED BY:	DATE	SCALE	DWG NO.	DC-D0239CH-x-S214
Tony Kao	05/13/19	1 : 1		
		SHEET NO.	PART NO.	DC-D0239CH-x-S214
		1 of 1		
				SIZE A4
				VER R