

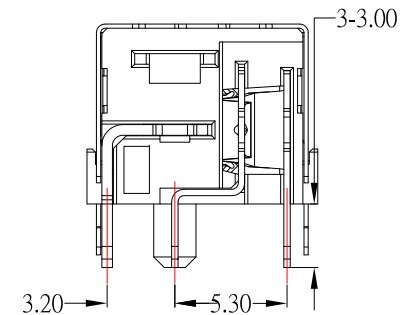
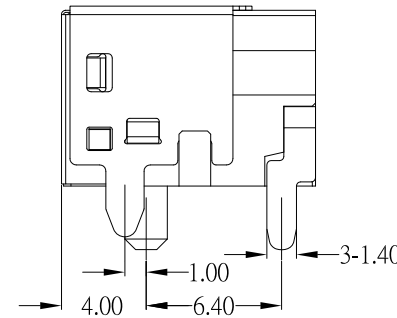
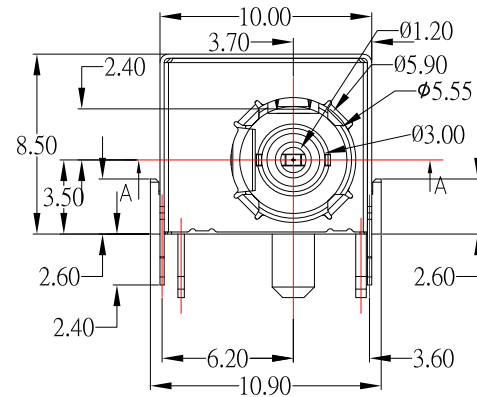
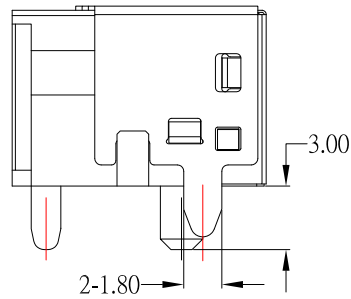
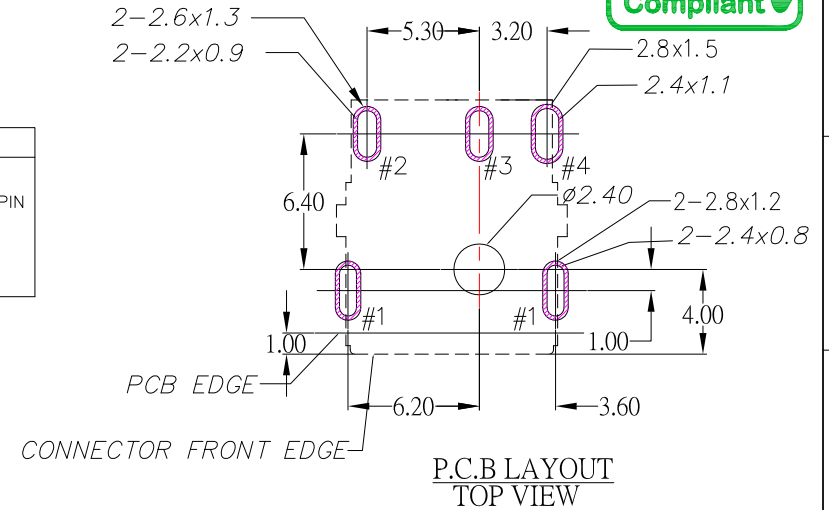




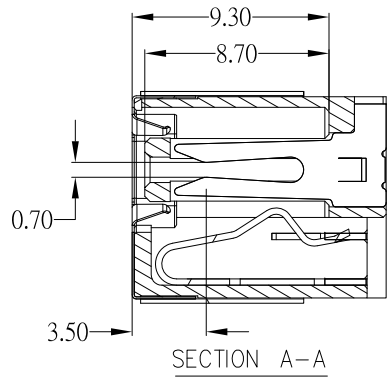

SPECIFICATION

- 1.Rating : 24V , 5.0A
- 2.Contact resistance : $\leq 50\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-40N
- 6.life test : 5,000 cycles

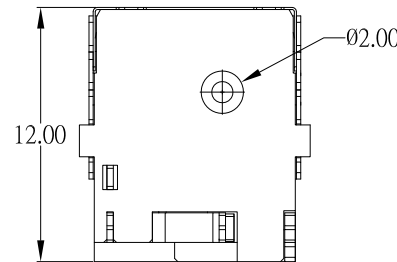

⑦	DUMMY PIN	1	STAINLESS STEEL	
⑥	SHELL	1	COPPER ALLOY	Tin over Ni
⑤	SHELL COVER	1	STAINLESS STEEL	Ni-Plating
④	M3	1	COPPER ALLOY	Ni-Plating
③	M4	1	COPPER ALLOY	Ni-Plating
②	CENTER PIN	1	COPPER ALLOY	Tin over Ni
①	HOUSING	1	HIGH TEMP PLASTIC	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
10/01/18
10/01/18
10/01/18

MAT'L
FINISH
SCALE
SHEET NO.

1 : 1
1 of 1

TITLE
MODLE
DWG NO.
PART NO.

JACK
DC JACK
DC-D296BH-1.0-S214
DC-D296BH-1.0-S214

SIZE
A4
VER
R4