

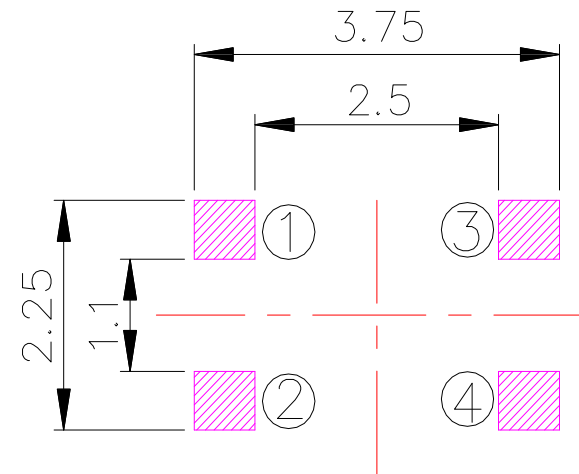

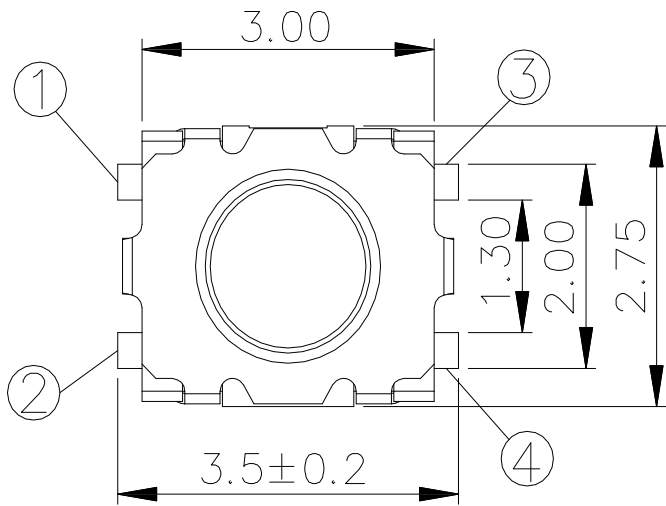




PCB LAYOUT

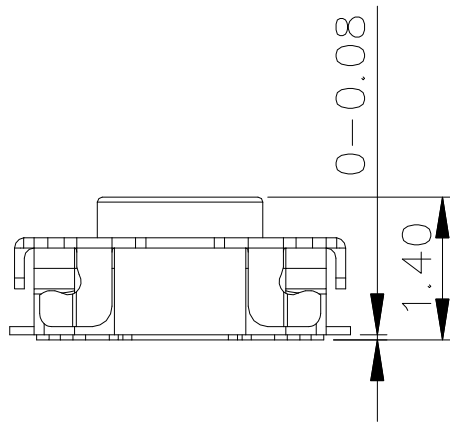

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 12V, 50mA.				
Contact Resistance	100 mΩ Max.				
Operating Force	10	80 ± 30gf	2	160 ± 50gf	3 260 ± 50gf
Operating Life (cycles)	200,000		100,000		

E	TERMINAL	4	PHOSPHOR BRONZE	Ag plated
D	BASE	1	LCP	
C	CONTACT	1	SUS	Ag plated
B	COVER	1	SUS	
A	STEM	1	LCP	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
04/11/24
DATE
04/11/24
DATE
04/11/24

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

SWITCH
TACT SWITCH
TS-A82-x-S138
TS-A82-x-S138

SIZE
A4
VER
R2