




[illegible]

P.C.B LAYOUT
TOP VIEW

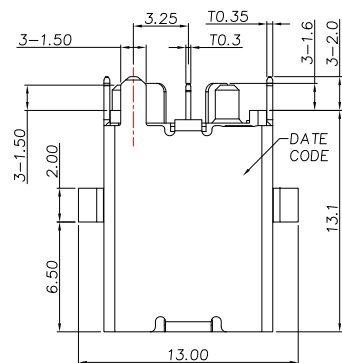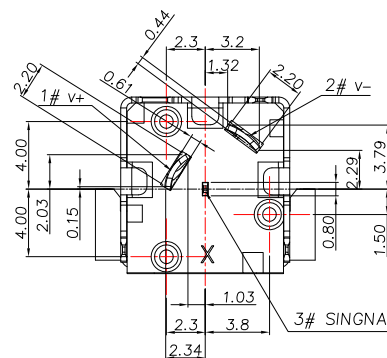

SCHEMATIC	
	2# V-
	1# V+
	3# SINGNA

- 1.Rating : DC 30V, 5.0A
- 2.Contact resistance : $\leq 30\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 150VAC
- 5.Insertion and extraction force : 7-30N
- 6.life test : 5,000 cycles

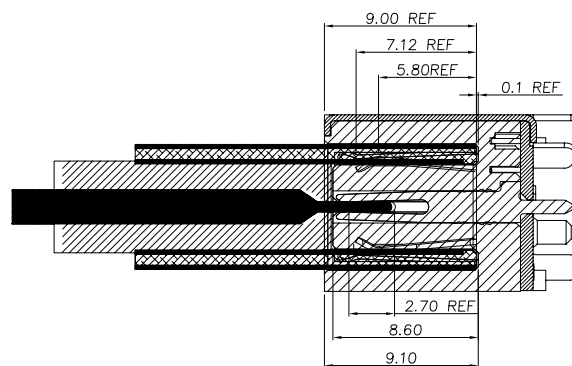

⑥	MYLAR	1	PET	
⑤	HOUSING	1	PA10T	
④	SHELL	1	BRASS	Ni-Plating
③	CONTACT 3	1	PHOSPHOR BRONZE	Au+Ni-Plating
②	CONTACT 2	1	PHOSPHOR BRONZE	Au+Ni-Plating
①	CONTACT 1	1	PHOSPHOR BRONZE	Au+Ni-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DRAWN BY:	DATE	MAT'L		TITLE	JACK	
Jack Lu	10/31/19					
CHECKED BY:	DATE	FINISH		MODLE	DC JACK	
Jacky Chen	10/31/19	SCALE	1 : 1	DWG NO.	DC-D3021VH-0.6-S214	SIZE A4
APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	DC-D3021VH-0.6-S214	VER P
Tony Kao	10/31/19					

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2
	Above 5 ~ 15	± 0.3
	Above 15 ~ 30	± 0.4
	Above 30 ~ 50	± 0.5
	Angle	± 0.3

3RD.
ANGEL'S



UNITS

MM

7			
ITEM NO.	DESCRIPTION	DRAWN	DATE