

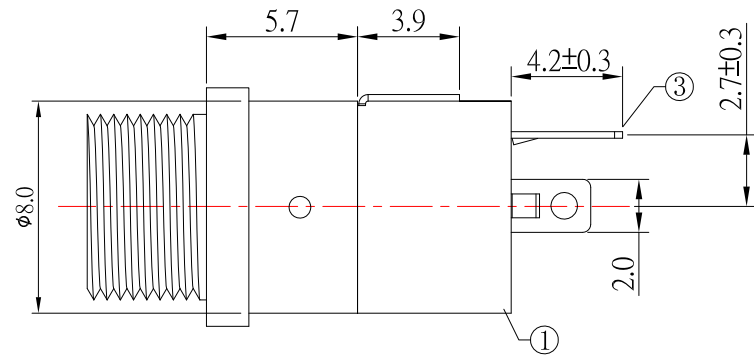
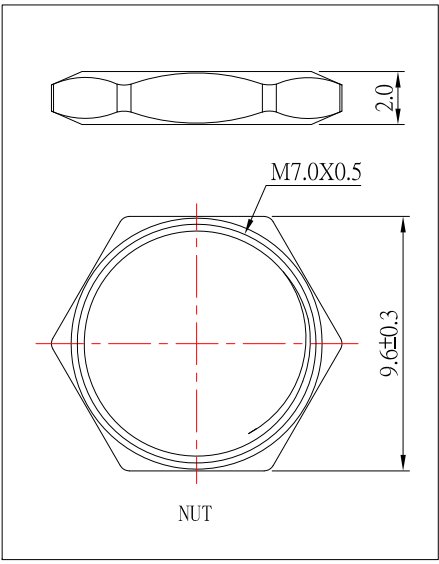
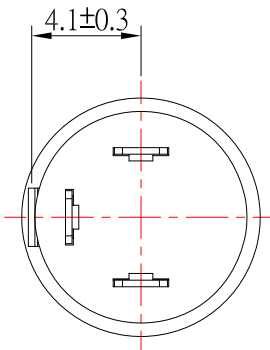
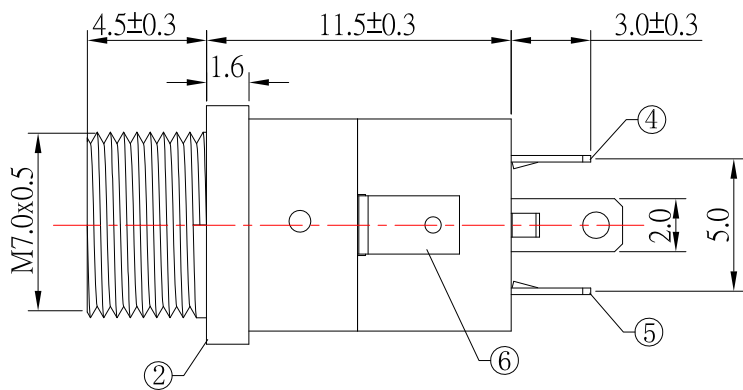





SCHEMATIC



SPECIFICATION

- 1.Rating : DC 30V , 1.0A
- 2.Contact resistance : $\leq 30m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 5-30N
- 6.life test : 5,000 cycles

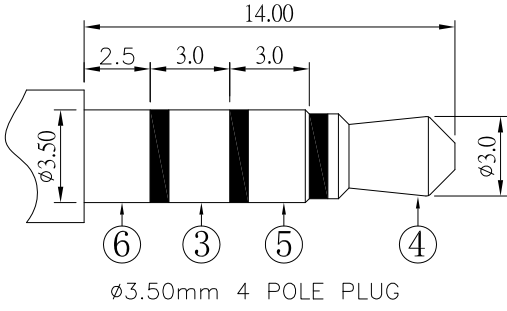

⑥	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
⑤	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
④	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
③	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
②	AXIS SUPPORT	1	BRASS	Ni-Plating
①	HOUSING	1	PBT	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°
3RD. ANGEL'S
UNITS MM

DRAWN BY:	DATE	MATL	TITLE	JACK
Jack Lu	10/21/21			
CHECKED BY:	DATE	FINISH	MODLE	3.5 PHONE JACK 4 pole 攻牙 焊線式
Jacky Chen	10/21/21			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-D3223M-S124
Tony Kao	10/21/21	1 : 1		
		SHEET NO.	PART NO.	PJ-D3223M-S124
				SIZE A4
				VER R2

2	更新尺寸	Jack	102121
1	更新材質	Jack	102021
ITEM NO.	DESCRIPTION	DRAWN	DATE