

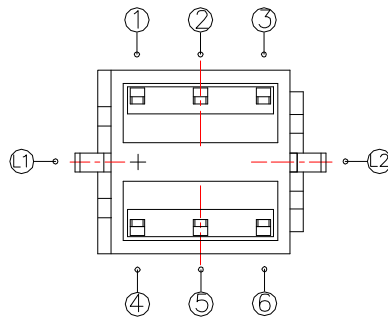
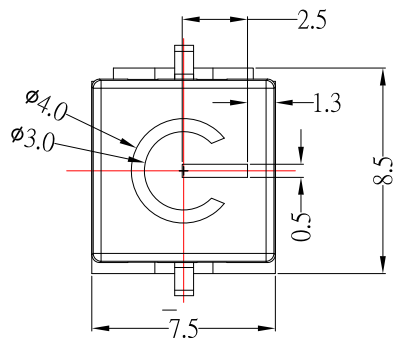
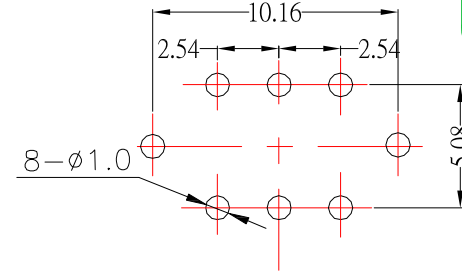


CIRCUIT DIAGRAM

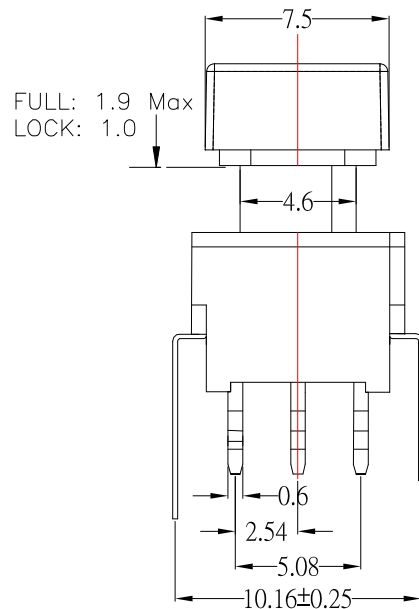

P.C.B LAYOUT

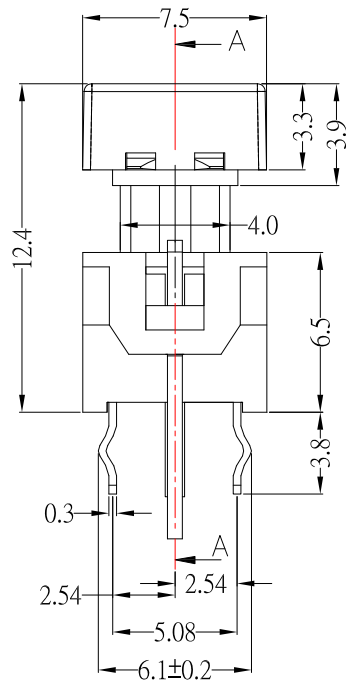

FULL: 1.9 Max
LOCK: 1.0

PS-xx-613x-A8-S313

COLOR OF LED

0	Without	1	Red
2	Green	3	Orange
4	Yellow	7	Blue
8	White		

L: SELF-LOCK
N: NON-LOCK

9	CAP	1	PC	Black
8	LED	1		
7	KNOB	1	POM / NYLON66	WHITE / Black
6	COVER	1	NYLON66	Black
5	LOCK PIN	1	SUS	Natural
4	CONTACT	2	PHOSPHOR BRONZE	Ag plated
3	SPRING	1	STEEL	Natural
2	CASE	1	NYLON66	Black
1	TERMINAL	2	BRASS	Ag Plated over Ni
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 09/06/21
DATE: 09/06/21
DATE: 09/06/21

MATL
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

SWITCH
PUSH SWITCH WITH LED
PS-xx-613x-A8-S313
PS-xx-613x-A8-S313

SIZE
A4
VER
R