


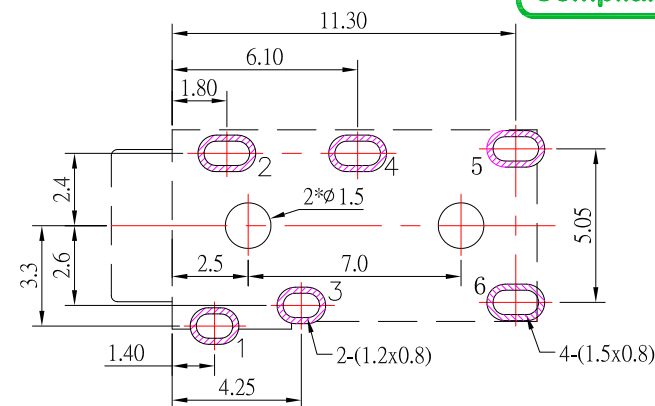
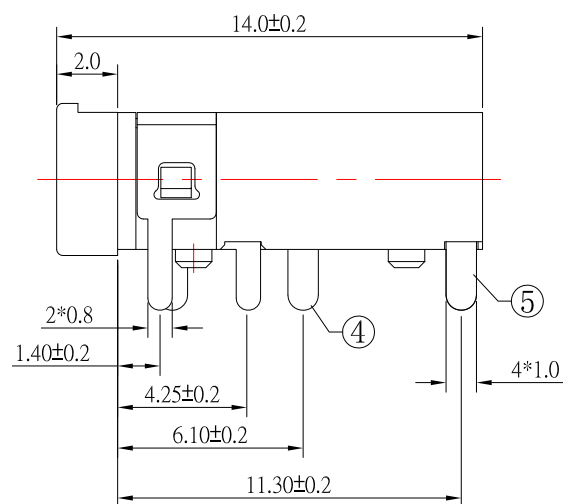


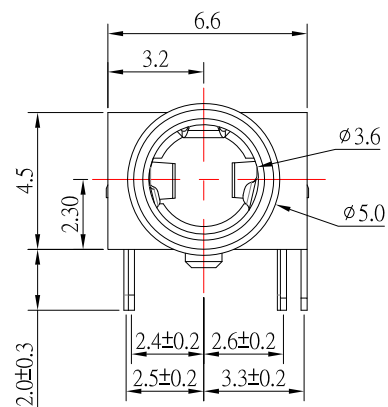


P.C.B LAYOUT
TOP VIEW

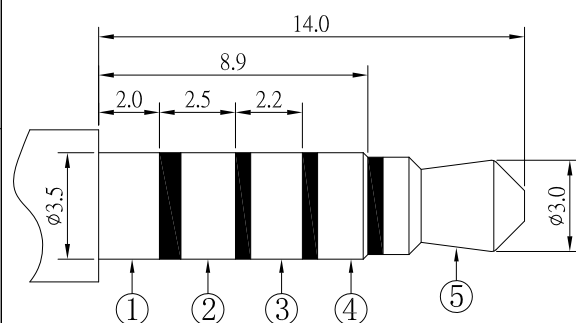

ø3.50mm 5 POLE PLUG

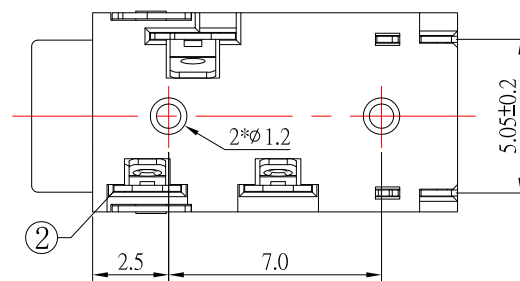

SCHEMATIC



SPECIFICATION

- 1.Rating : DC 30V , 0.5A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles °

⑦	HOUSING	1	PA9T	
⑥	CURVE PIECE	1	BRASS	Ag-Plating
⑤	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
④	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
③	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
②	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
①	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
No	PART NAME	QTY	MATERIAL	REMARK

7			
1	更新MODLE	Jack	111621
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
: Above 30 ~ 50	± 0.5
Angle	$\pm 0.3^\circ$

3RD.



UNITS

MM

DRAWN BY:	DATE	MAT'L		TITLE	JACK	
Jack Lu	11/16/21					
CHECKED BY:	DATE	FINISH		MODLE	PHONE JACK 5POLE	
Jacky Chen	11/16/21					
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	PJ-D3521-S124	SIZE
Tony Kao	11/16/21	SHEET NO.	1 of 1	PART NO.	PJ-D3521-S124	A4
						VER
						R1