

— 鍍層厚度：

Blank : 1u"
2 : 15u"
3 : 30u"

RECOMMENDED PCB LAYOUT (TOP VIEW)

NOTE:

- 1.MATERIAL:

- 1.1 HOUSING: LCP, BLACK
1.2 CONTACT: BRASS
1.3 SHEEL: BRASS

- 2.PLATING :





- 2.1 CONTACT: PLATED GOLD IN MATING AREA ;
TIN PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL
- 2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER

- ### 3.MECHANICAL:

- 3.1 INSERTION FORCE: 4.5 Kgf MAX
3.2 WITHDRAWAL FORCE: 1.0 ~ 4.0 Kgf

- 4.ELECTRICAL:

- 4.1 RATING: 40V,0.5A
4.2 CONTACT RESISTANCE: 30 mΩ Max
4.3 INSULATION RESISTANCE: 100MΩ Min
4.4 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC / minute
4.5 OPERATING TEMPERATURE: -25°C~ 85°C

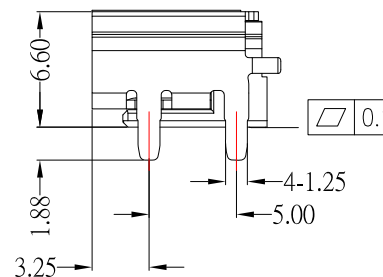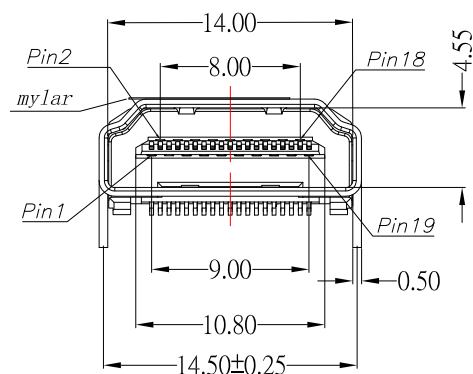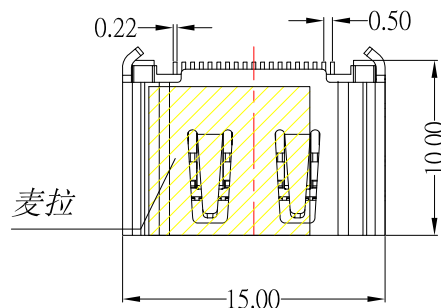

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2
	Above 5 ~ 15	± 0.3
	Above 15 ~ 30	± 0.4
	Above 30 ~ 50	± 0.5
	Angle	± 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	09/27/2

CHECKED BY:	DATE
Jacky Chen	09/27/2

APPROVED BY:	DATE
Tony Kao	09/27/2

DATE _____

09/27/21

DATE _____

09/27/21

3.6.4. ERIT

1	MAT L
---	-------

FINISH

[illegible]

--	--

TITLE

MODLE

[illegible]

	CONVECTOR
--	-----------

	CONNECTOR
--	-----------

HDMI A TYPE FEMALE

UDM 400 BM 3465

	SIZE
--	------

	A4
--	----

VER
D