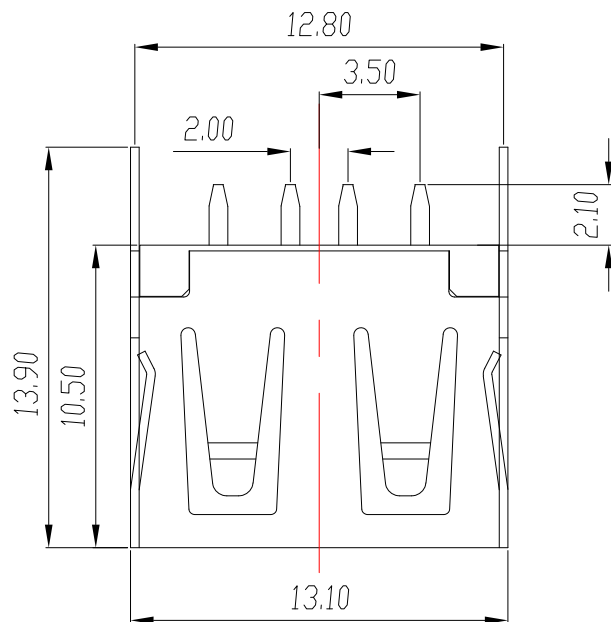


P.C.B LAYOUT

SPECIFICATIONS

Electrical:

- 1.Current Rating: 1.5A / contact terminal
- 2.Voltage Rating: 30 VDC
- 3.Contact Resistance: 30 mΩ Max
- 4.Dielectric Withstanding Voltage: 500 V AC AT Sec Level
- 5.Insulation Resistance: 1,000 MΩ_Min

MATERIAL

- 1.Housing: PBT
- 2.Contact: Brass
- 3.Shell: Spcc

Finish:


- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

SUA-110V26I-x-S236

Color :

Black : B

White : W

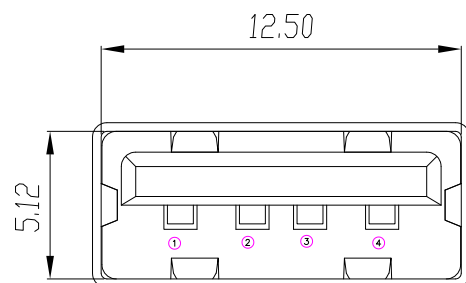

				DRAWN BY: Jack Lu				DATE	07/03/26	MAT'L		TITLE	CONNECTOR
				CHECKED BY: Jacky Chen				DATE	07/03/26	FINISH		MODLE	USB AF 直立式 插板直脚無捲邊 L10.5mm 脚距 2.20mm
				APPROVED BY: Tony Kao				DATE	07/03/26	SCALE	1 : 1	DWG NO.	SUA-110V26I-x-S236
										SHEET NO.	1 of 1	PART NO.	SUA-110V26I-x-S236
													SIZE A4
													VER R3

建倚科技股份有限公司

CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S

UNITS

MM

3	更新圖面	Jack	070326
2	新增PCB LAYOUT尺寸	Jack	071924
1	更新外殼材質只做SPCC	Jack	051121
ITEM NO.	DESCRIPTION	DRAWN	DATE