

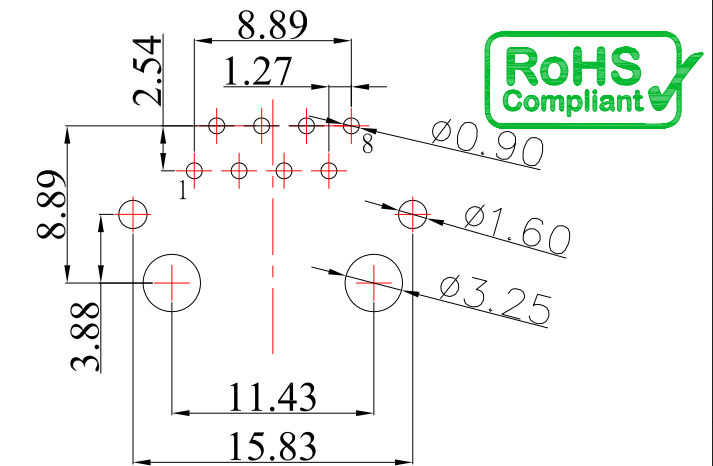
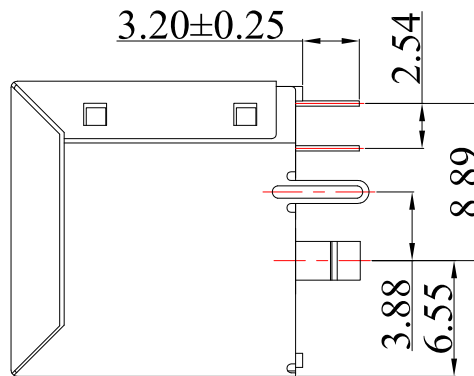


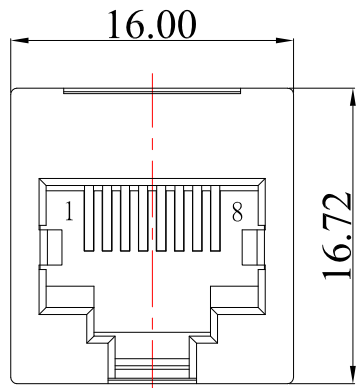

PCB LAYOUT MOUNTING PATTERN

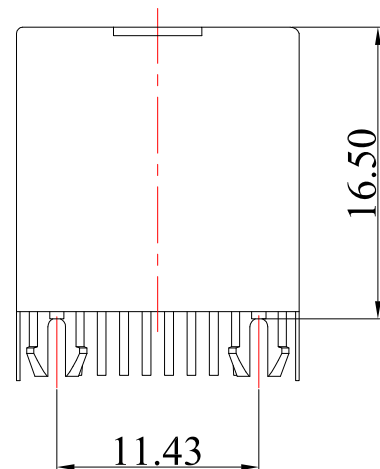

RJ45-52E811E-x-S307

鍍層厚度：

Blank : 1u"
1 : 3u"
2 : 15u"
3 : 30u"
5 : 6u"

SPECIFICATIONS

Electrical:

- 1.Voltage Rating : 125 VAC RMS
- 2.Current Rating : 1.5 AMP
- 3.Contact Resistance : 30 mΩ MAX
- 4.Insulation Resistance : 500 MΩ MIN. @500 VDC
- 5.Dielectric Strength : 1000 VAC

Mechanical:

- 1.Housing : PBT,Black
- 2.Insert : PBT,Black
- 3.Contact : Phosphor Bronze , Gold Plating over Nickel
- 4.Shield : Brass, Nickel Plated

Environmental:

- 1.Operation Temperature : -40°C ~ +85°C
- 2.Storage Temperature : -40°C ~ +85°C

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
08/04/21
DATE
08/04/21
DATE
08/04/21

MAT'L
FINISH
SCALE

TITLE
MODLE
DWG NO.
PART NO.

RJ45
RJ45
1 : 1

RJ45
RJ45-52E811E-x-S307
RJ45-52E811E-x-S307

SIZE
A4
VER
R

ITEM NO. DESCRIPTION DRAWN DATE