

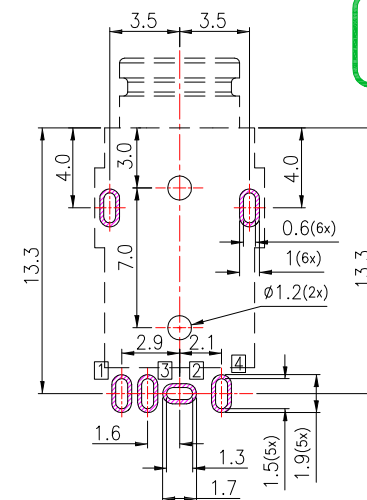

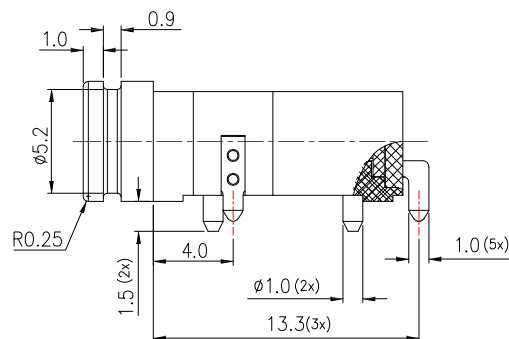

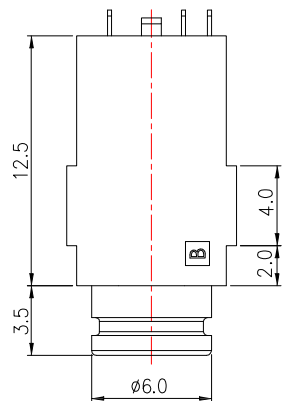


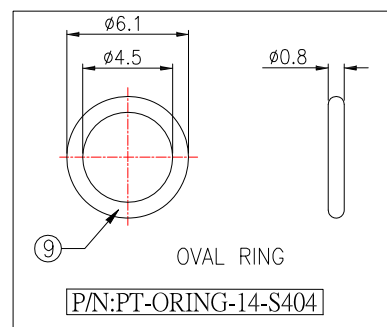

- 1.Rating : 12V , 1.0A
- 1.Contact resistance : $\leq 30\text{m}\Omega$
- 2.Insulation resistance : $\geq 100\text{M}\Omega$
- 3.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles
- 7.Waterproof Lever: IPx7

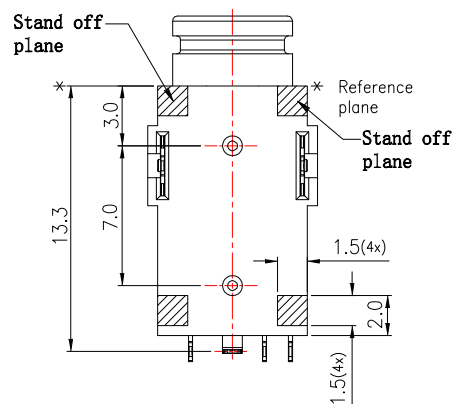

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

DRAWN BY:	DATE	MAT'L		TITLE	JACK		
Jack Lu	08/03/20						
CHECKED BY:	DATE	FINISH		MODLE	3.5mm PHONE JACK 防水型		
Jacky Chen	08/03/20						
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	PJ-WP35434C-S404		SIZE
							A4
Tony Kao	08/03/20	SHEET NO.	1 of 1	PART NO.	PJ-WP35434C-S404		VER
							R1