





SBC-W240VSE-31x-S410

鍍層厚度:


Blank : 1u"

2 : 15u"


3 : 30u"

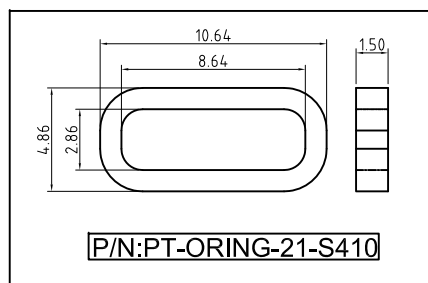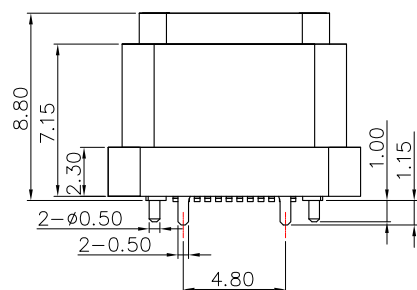

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

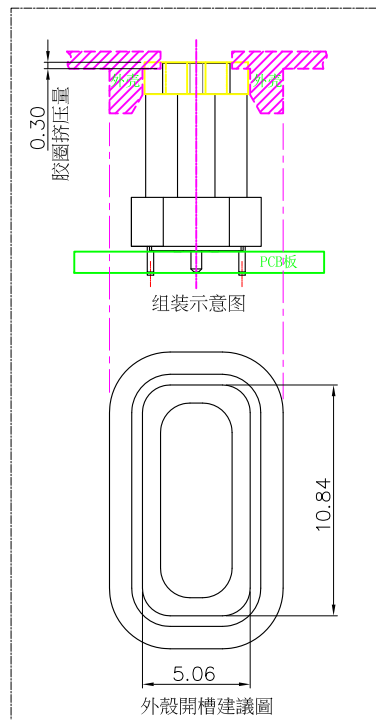

IP67

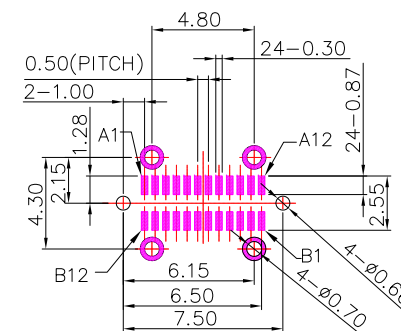

RECOMMENDED P.C.B. LAYOUT

SPECIFICATIONS

Electrical:

1. Rating: 3.0A

2.Contact Resistance: 40 mΩ Max

3.Insulation Resistance: 100 MΩ Min

4.Dielectric Withstanding Voltage: 100V AC

6	防水圈	硅胶	BLACK
5	SHELL	STAINLESS STEEL	Ni Plated
4	SHIELDING PLATE	STAINLESS STEEL	Ni Plated
3	CONTACT	C7025	Au/Ni Plated
2	SHELL HOUSING	PA10T	BLACK
1	HOUSING	LCP	BLACK
NO.	DESCRIPTION	MATERIAL	REMARKS



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu DATE: 08/02/22
CHECKED BY: Jacky Chen DATE: 08/02/22
APPROVED BY: Tony Kao DATE: 08/02/22

MAT'L		TITLE	USB CONNECTOR
FINISH		MODLE	TYPE C/F 3.1 VERTICAL SMT TYPE
SCALE	1 : 1	DWG NO.	SBC-WP240VSE-31x-S410
SHEET NO.	1 of 1	PART NO.	SBC-WP240VSE-31x-S410
		SIZE	A4
		VER	R1