





IPX7



MRUSB-5AB-WP18x-S410

鍍層厚度:

Blank : 1u"
2 : 15u"
3 : 30u"

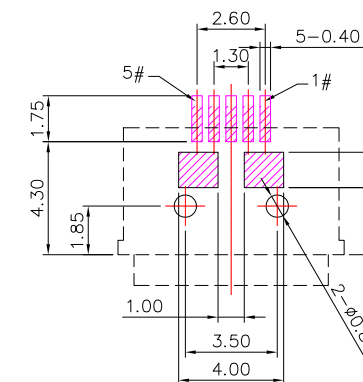

P.C.B LAYOUT MOUNTING PATTERN
TOP VIEW

Contact Number	Signal Name	Remarks
1#	VBUS	Power
2#	D-	Date-
3#	D+	Date+
4#	ID	Reserve or Gound
5#	GND	Gound

NOTES:

MATERIAL:

1.1 HOUSING: HIGH-TEMP-PLASTIC

1.2 CONTACT: COPPER ALLOY

1.3 SHELL: COPPER ALLOY / SUS

FINISH:

2.1 CONTACT: PLATED GOLD IN MATING AREA ;
GOLD PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL

2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER


3.SPECIFICATION:

3.1 RATING: AC 30V , 1.8A(PIN1&5) , 0.5A(PIN2&3&4)






3.2 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC

3.3 CONTACT RESISTANCE: 30 mΩ MAX.

3.4 INSULATION RESISTANCE: 100 MΩ MIN.



SEC: A-A

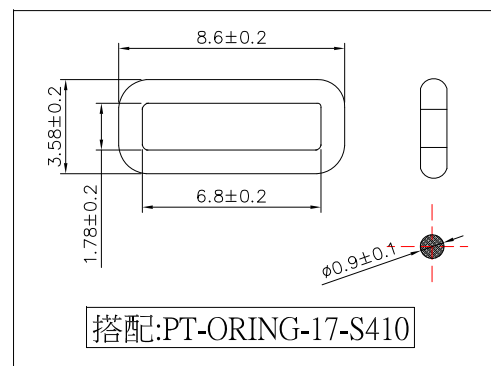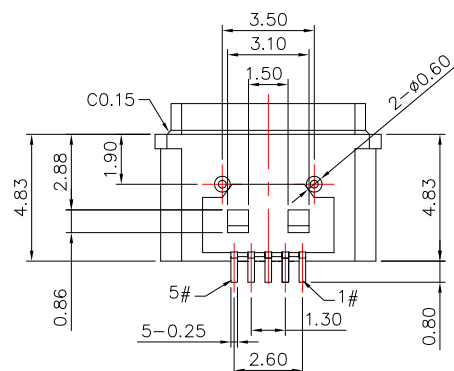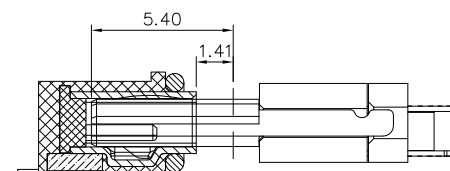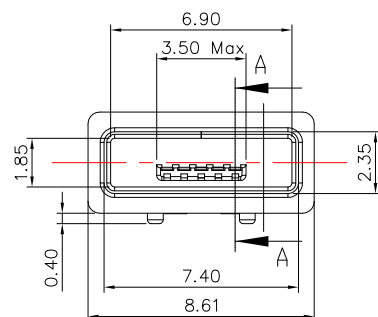

搭配:PT-ORING-17-S410

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao
DATE: 06/07/21

MAT'L
FINISH
SCALE
SHEET NO.

DATE: 06/07/21
DATE: 06/07/21
DATE: 06/07/21
1 : 1
1 of 2

TITLE
MODLE
DWG NO.
PART NO.

CONNECTOR
MICRO USB 5PF AB TYPE H 3.5
防水型 IPX7
MRUSB-5AB-WP18x-S410
MRUSB-5AB-WP18x-S410

SIZE
A4
VER
R