



SUA-110V8I-x-S329

COLOR :

Black : B

White : W

P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATIONS

Electrical:






- 1.Contact Resistance: 30 m $\Omega$  Max
- 2.Insulation Resistance: 1,000 M $\Omega$  Min
- 3.Dielectric Withstanding Voltage: 500 V DC

Material:

- 1.Housing: PBT, UL 94V-0
- 2.Contact: BRASS
- 3.Shell: SPCC

Finish:

- 1.Contact: Plated Gold in Mating Area ;  
Tin Plated on Solder Balls  
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

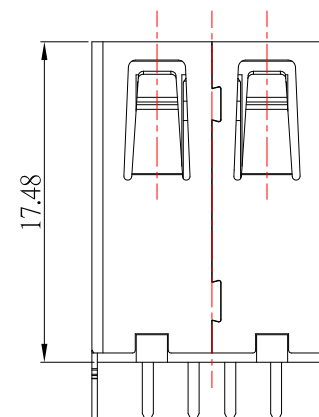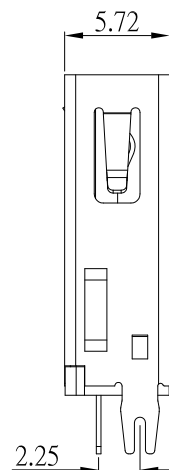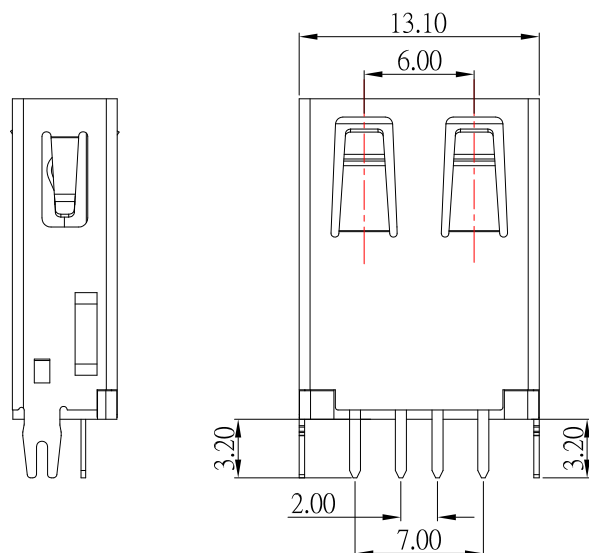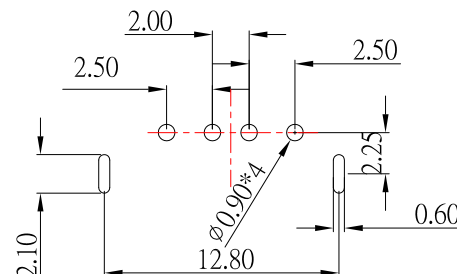

**CONTACT**

建倚科技股份有限公司  
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS  
OTHERWISE STATED :

Up to 5  $\pm 0.2$   
Above 5 ~ 15  $\pm 0.3$   
Above 15 ~ 30  $\pm 0.4$   
Above 30 ~ 50  $\pm 0.5$   
Angle  $\pm 0.3^\circ$

3RD.  
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu  
CHECKED BY: Jacky Chen  
APPROVED BY: Tony Kao

DATE: 06/17/22  
DATE: 06/17/22  
DATE: 06/17/22

|           |        |          |                           |
|-----------|--------|----------|---------------------------|
| MATL      |        | TITLE    | CONNECTOR                 |
| FINISH    |        | MODLE    | USB A/F 插板 無捲邊直腳 L:17.5mm |
| SCALE     | 1 : 1  | DWG NO.  | SUA-110V8I-x-S329         |
| SHEET NO. | 1 of 1 | PART NO. | SUA-110V8I-x-S329         |

SIZE  
A4  
VER  
R1