








3 级插头接触点位置尺寸



5 级插头接触点位置尺寸

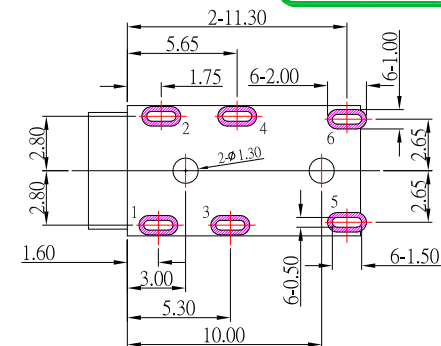

P.C.B LAYOUT

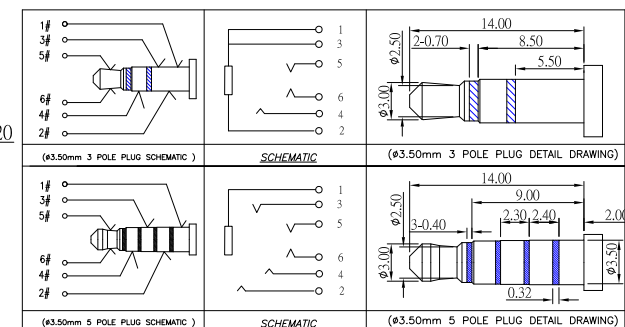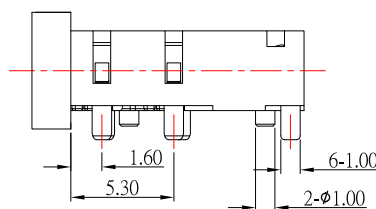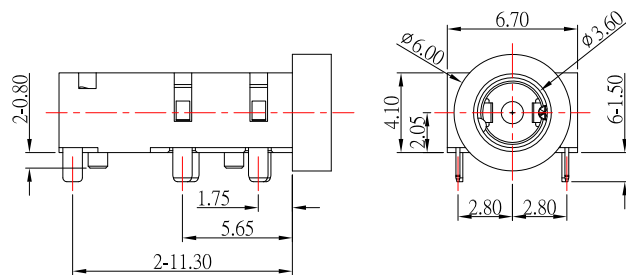

SPECIFICATION

- Rating : 1.0A ;
- Contact resistance : $\leq 100\text{m}\Omega$;
- Insulation resistance : $\geq 100\text{M}\Omega$;
- Withstand voltage : 500VAC ;
- Insertion and extraction force : 3-30N;
- life test : 5,000 cycles °

8	METAL BUSHING		C3604,GOLD FLASH
7	HOUSING	1	PA10T,COLOR BLACK.
6	TERMINAL 6#	1	STAINLESS STEEL; NICKEL UNDER PLATING OVERALL,GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA
5	TERMINAL 5#	1	
4	TERMINAL 4#	1	
3	TERMINAL 3#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL,GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA
2	TERMINAL 2#	1	
1	TERMINAL 1#	1	
ITEM	NAME	Q'TY	DESCRIPTION



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 07/11/22
DATE: 07/11/22
DATE: 07/11/22

MAT'L
FINISH
SCALE
SHEET NO.

TITLE: JACK
MODLE: PHONE JACK
DWG NO.: PJ-T53063-S214
PART NO.: PJ-T53063-S214

SIZE: A4
VER: R1

1	更新材質	Jack	071122
ITEM NO.	DESCRIPTION	DRAWN	DATE