

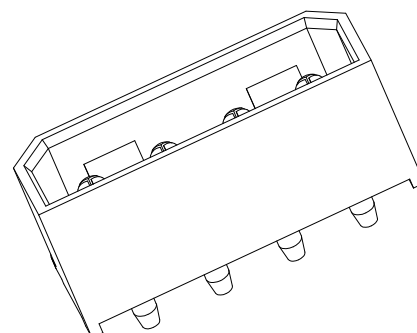
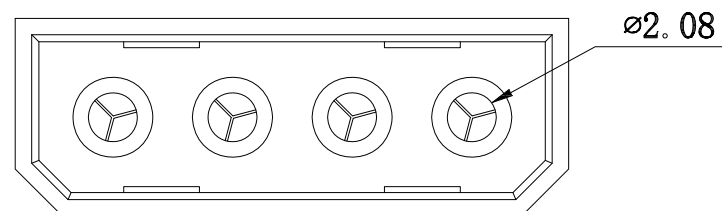


P. C. B LAYOUT

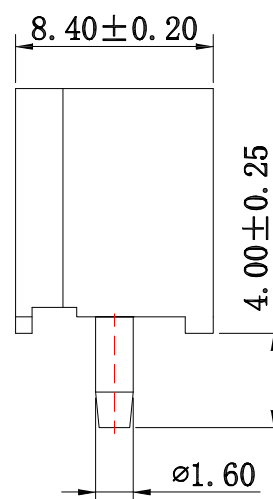

SPECIFICATIONS

Current rating : 5.0A AC , DC
Voltage rating : 250V AC , DC
Temperature rating : -25°C ~ +85°C
Insulation resistance : 1,000 MΩ min.
Withstand voltage : 1,500V AC/minute
Contact resistance : 20 mΩ /Max
Material:
Base : Nylon66
Pin : Brass / Tin-plated

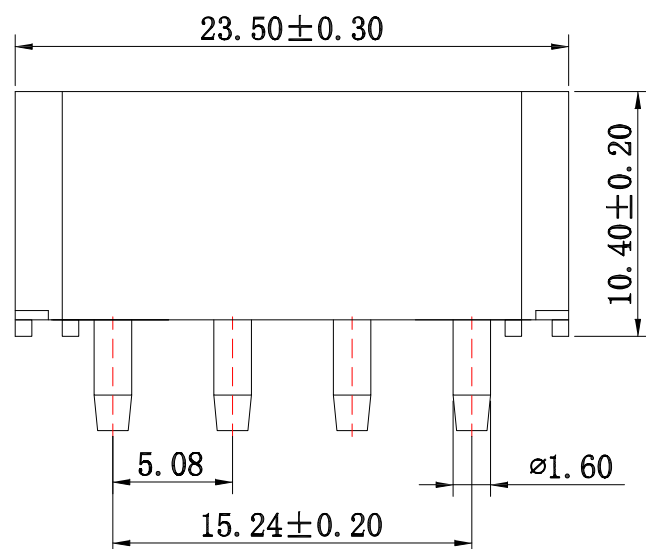

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 11/17/17
DATE: 11/17/17
DATE: 11/17/17

MAT'L	TITLE	CONNECTOR
FINISH	MODLE	WAFER 5.08 DIP 大四P 180度
SCALE	DWG NO.	WF-5080VD04-S304
SHEET NO.	PART NO.	WF-5080VD04-S304

SIZE
A4
VER
R

ITEM NO.	DESCRIPTION	DRAWN	DATE