
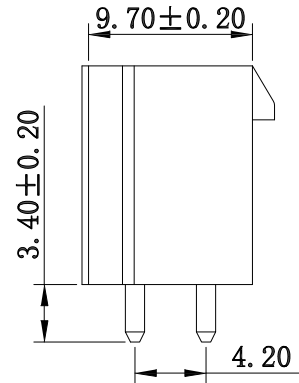


P.C.B LAYOUT MOUNTING PATTERN

| PART NO. | Dimensions (mm) |       |
|----------|-----------------|-------|
|          | A               | B     |
| 02       | —               | 5.60  |
| 04       | 4.20            | 9.80  |
| 06       | 8.40            | 14.00 |
| 08       | 12.60           | 18.20 |
| 10       | 16.80           | 22.40 |
| 12       | 21.00           | 26.60 |
| 14       | 25.20           | 30.80 |
| 16       | 29.40           | 35.00 |
| 18       | 33.60           | 39.20 |
| 20       | 37.80           | 43.40 |
| 22       | 42.00           | 47.60 |
| 24       | 46.20           | 51.80 |

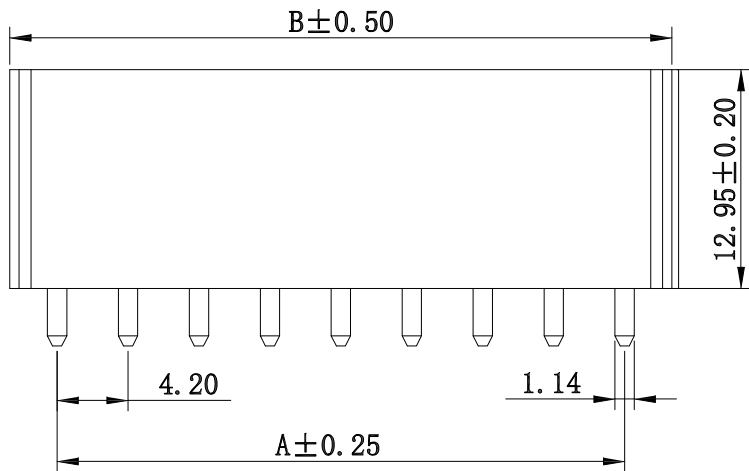

#### SPECIFICATIONS

Current rating : 7.0A AC , DC

Voltage rating : 250V AC , DC

Temperature rating : -25°C ~ +85°C

Insulation resistance : 1,000 M $\Omega$  min.

Withstand voltage : 1500V AC/minute

Contact resistance : 10 m $\Omega$  max.

Material:

Housing : Nylon 66

Pin : Brass / Tin-plated



建倚科技股份有限公司  
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS  
OTHERWISE STATED :  
Up to 5  $\pm 0.2$   
Above 5 ~ 15  $\pm 0.3$   
Above 15 ~ 30  $\pm 0.4$   
Above 30 ~ 50  $\pm 0.5$   
Angle  $\pm 0.3^\circ$

3RD.  
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu  
DATE: 07/05/19

CHECKED BY: Jacky Chen  
DATE: 07/05/19

APPROVED BY: Tony Kao  
DATE: 07/05/19

|           |        |          |                                                   |
|-----------|--------|----------|---------------------------------------------------|
| MAT'L     |        | TITLE    | CONNECTOR                                         |
| FINISH    |        | MODLE    | MINI FIT JR VERTICAL POWER CONNECTOR<br>PH: 4.2mm |
| SCALE     | 1 : 1  | DWG NO.  | WF-4255VD2xx-S304                                 |
| SHEET NO. | 1 of 1 | PART NO. | WF-4255VD2xx-S304                                 |
|           |        | SIZE     | A4                                                |
|           |        | VER      | R1                                                |