
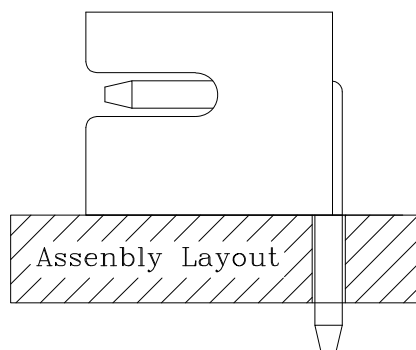
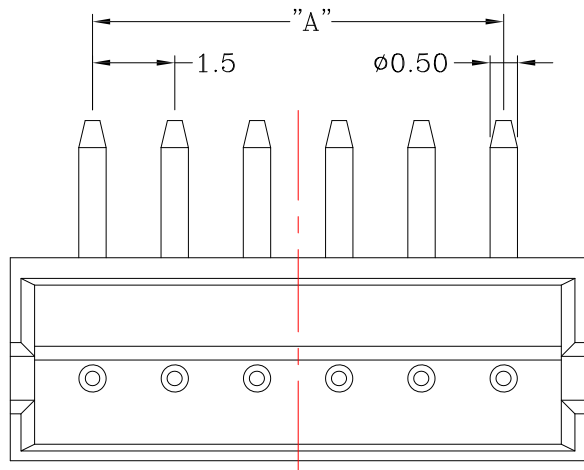
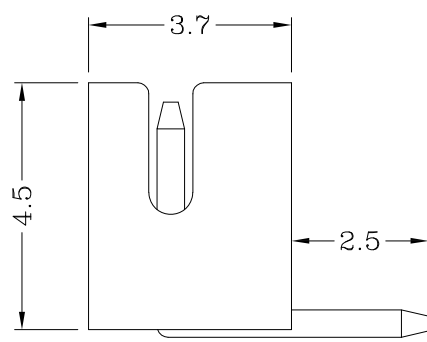


P.C.B LAYOUT MOUNTING PATTERN

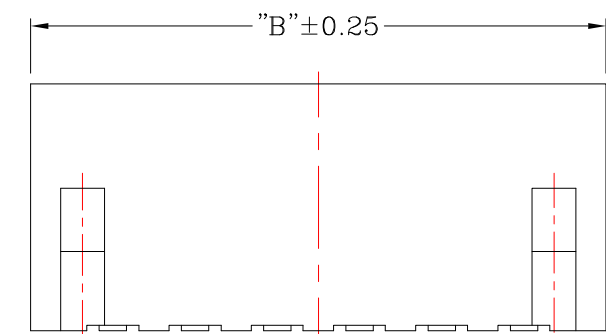

SPECIFICATIONS

- 1.Current rating : 1.0A
- 2.Voltage rating : 50V, AC / DC
- 3.Temperature rating : -25°C ~ +85°C
- 4.Insulation resistance : 1000MΩ min.
- 5.Contact resistance : 20mΩ/Max
- 6.Withstand Voltage : 500V AC / minute

Material:

- 1.Housing : PA46
- 2.Contact : Brass,Tin over Nickel

	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
DIM.A	1.50	3.00	4.50	6.00	7.50	9.00	10.50	12.00	13.50	15.00	16.50	18.00	19.50	21.00	22.50
DIM.B	4.50	6.00	7.50	9.00	10.50	12.00	13.50	15.00	16.50	18.00	19.50	21.00	22.50	24.00	25.50

				CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP.						DRAWN BY: DATE		MAT'L		TITLE	CONNECTOR		
										Jack Lu 10/14/24							
										CHECKED BY: DATE		FINISH		MODLE	WAFER 1.5 PIN 90度		
										Jacky Chen 10/14/24							
				APPROVED BY: DATE		SCALE	1 : 1	DWG NO.	WF-1500RDxx-S304		SIZE						
1	更新樣式	Jack	101424	TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°							3RD. ANGEL'S		UNITS	MM	A4		
ITEM NO.	DESCRIPTION	DRAWN	DATE							Tony Kao	10/14/24	SHEET NO.	1 of 1	PART NO.	WF-1500RDxx-S304	VER	
																	R1