


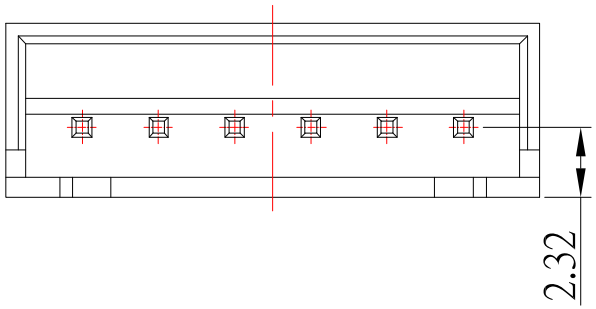


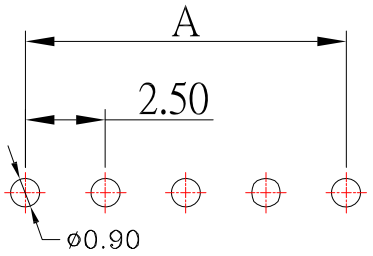

P.C.B LAYOUT MOUNTING PATTERN

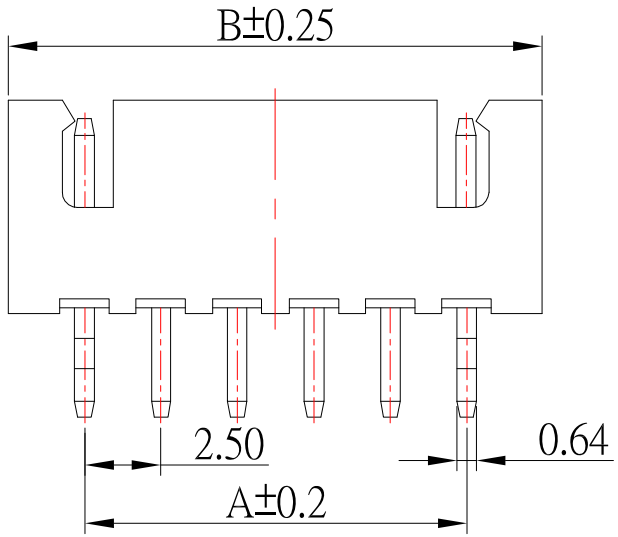

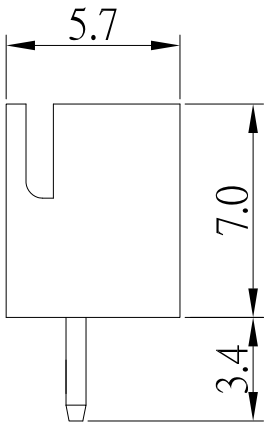

	DIM. A	DIM. B
2	2.50	7.50
3	5.00	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	42.50
17	40.00	45.00
18	42.50	47.50
19	45.00	50.00
20	47.50	52.50

SPECIFICATIONS

1.Current rating : 3.0A
2.Temperature rating : -25˚C ~ +85˚C
3.Insulation resistance : 1000MΩ min.
4.Contact resistance : 20mΩ / Max
Material:
Housing : PA66
Contact : Brass , Tin plated over Nickel

ITEM NO.	DESCRIPTION	DRAWN	DATE
8	更新尺寸位置	Jack	070523
7	新增尺寸	Jack	070323
6	更新圖面	Jack	080922
5	新增尺寸	Jack	081320
4	更新樣式	Lan	041819
3	更新圖面	Jack	040219
2	更新尺寸	Jack	062917
1	更新材質	Jack	041116

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2; Above 5 ~ 15 ±0.3; Above 15 ~ 30 ±0.4; Above 30 ~ 50 ±0.5; Angle ±0.3˚

3RD. ANGEL'S | UNITS MM

DRAWN BY: Jack Lu	DATE 07/05/23	MAT'L	
CHECKED BY: Jacky Chen	DATE 07/05/23	FINISH	
APPROVED BY: Tony Kao	DATE 07/05/23	SCALE 1 : 1	SHEET NO. 1 of 1

TITLE	CONNECTOR		
MODLE	2.54 WAFER 180 度 H:7.0mm		
DWG NO.	WF-2501VDxx-S304	SIZE	A4
PART NO.	WF-2501VDxx-S304	VER	R8