







FH-B31-x2xxxC-S304

Insulator Material:

2 : LCP
3 : PA6T

PIN數

	L1	L2	L3	L4
A	4.00	4.30	6.20	4.00
B	4.30	4.60	6.00	4.00
C	4.30	4.60	6.20	4.00
D	6.35	6.75	6.40	4.00

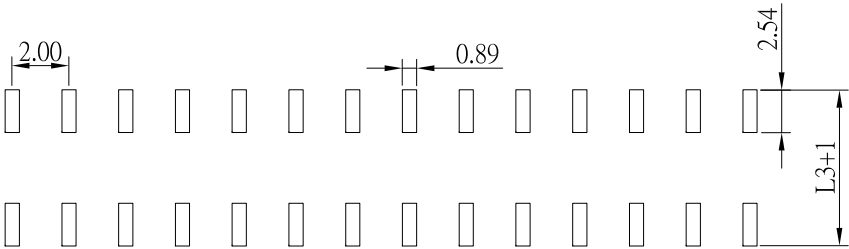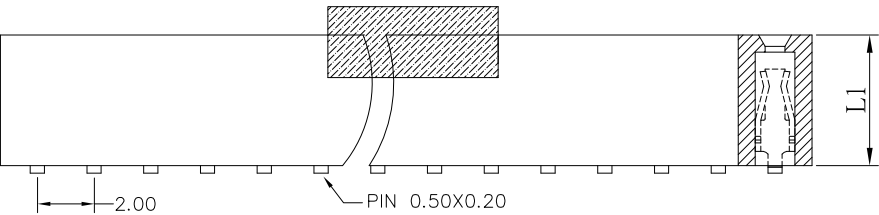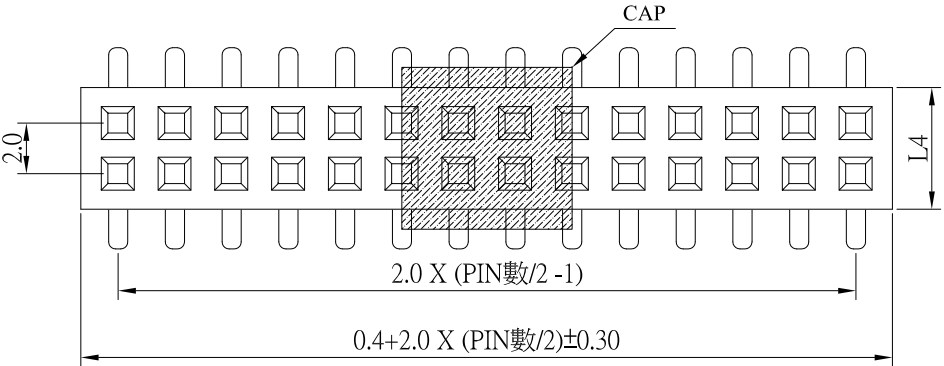

P.C.B. LAYOUT

SPECIFICATIONS:

- 1.Current Rating : 1.5 AMP
- 2.Insulation Resistance : 1000MΩ Min
- 3.Dielectric Withstanding : 500V AC
- 4.Contact Resistance : 20mΩ Max

MATERIALS:

- 1.Contact : Brass
- 2.Insulator : Polyester
- 3.Contact Finish : Gold Plated over Nickel

				CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP.				DRAWN BY: Jack Lu		DATE: 06/16/21		MAT'L		TITLE: Female Header					
								CHECKED BY: Jacky Chen		DATE: 06/16/21		FINISH		MODLE: Female Header 加CAP					
				TOLERANCE UNLESS OTHERWISE STATED :		Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°		3RD. ANGEL'S				UNITS: MM		SCALE: 1 : 1		DWG NO. FH-B31-x2xxxC-S304		SIZE: A4	
														APPROVED BY: Tony Kao		DATE: 06/16/21		SHEET NO. 1 of 1	
ITEM NO.		DESCRIPTION		DRAWN		DATE													
A		B		C		D		E		F		G		H		I		J	