



FH-A12-02xxx-S304

PIN數




	L1	L2	L3
A	8.5	1.2	3.1

SPECIFICATIONS:

- 1.Current Rating : 3.0 AMP
- 2.Insulation Resistance : 1000MΩ Min
- 3.Dielectric Withstanding : 1000V AC
- 4.Contact Resistance : 20mΩ Max
- 5.Operation Temperature : -40℃ to +105℃

MATERIALS:

- 1.Contact : Phosphor Bronze
- 2.Insulator : PBT ,UL94V-0
- 3.Contact Finish : Gold over Nickel

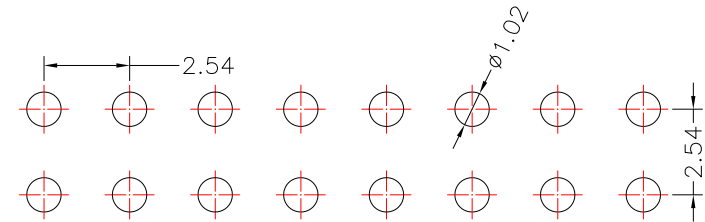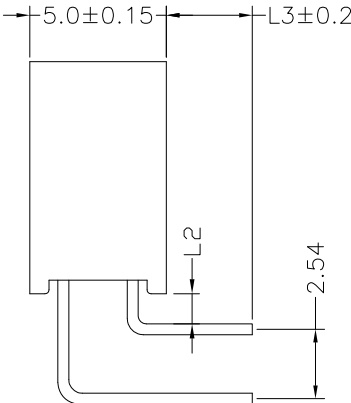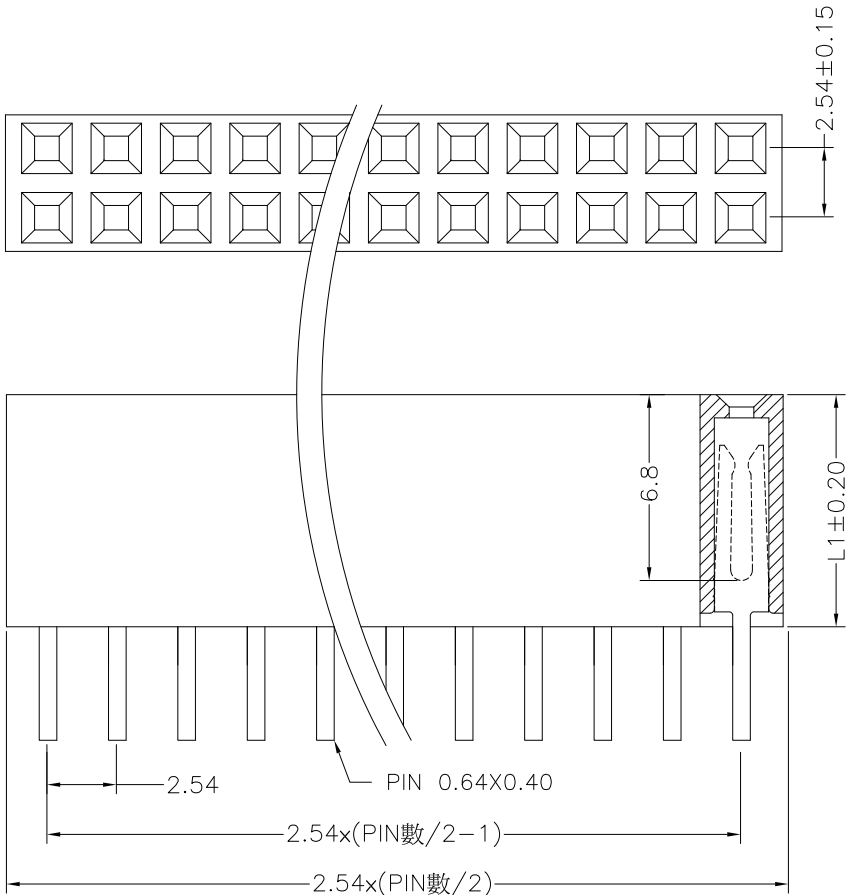

P.C.B. LAYOUT

				CONTACT 建倚科技股份有限公司			DRAWN BY:	DATE	MAT'L		TITLE	Female Header	
				CONTACT TECHNOLOGY CORP.			Jack Lu	08/07/17			MODLE	2.54 排母 雙排 R/A	
							CHECKED BY:	DATE	FINISH		DWG NO.	FH-A12-02xxx-S304	SIZE
							Jacky Chen	08/07/17			SCALE	1 : 1	A4
							APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	FH-A12-02xxx-S304	VER
							Tony Kao	08/07/17					R
ITEM NO.	DESCRIPTION			DRAWN	DATE	TOLERANCE UNLESS OTHERWISE STATED :		Up to 5 ±0.2	3RD. ANGEL'S	UNITS	MM		
								Above 5 ~ 15 ±0.3					
								Above 15 ~ 30 ±0.4					
								Above 30 ~ 50 ±0.5					
								Angle ±0.3°					