
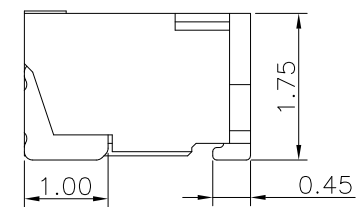


P.C.B LAYOUT MOUNTING PATTERN

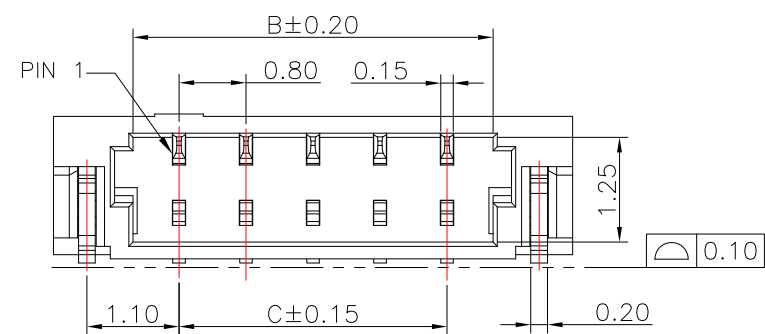

**SPECIFICATIONS**

- 1.Current rating : 0.3A AC , DC(AWG 34#)  
0.8A AC , DC(AWG 32#)
- 2.Voltage rating : 30V AC , DC
- 3.Temperature rating : -25°C ~ +85°C

Material:

- 1.Housing : LCP
- 2.Contact : PhosphorBronze,Gold Plated over all Nickel
- 3.Peg : Brass, Gold Plated over all Nickel

PIN No.	Dimensions(mm)			PIN No.	Dimensions(mm)		
	A	B	C		A	B	C
02	3.80	1.90	0.80	14	13.40	11.50	10.40
03	4.60	2.70	1.60	16	15.00	13.10	12.00
04	5.40	3.50	2.40	18	16.60	14.70	13.60
05	6.20	4.30	3.20	20	18.20	16.30	15.20
06	7.00	5.10	4.00				
07	7.80	5.90	4.80				
08	8.60	6.70	5.60				
09	9.40	7.50	6.40				
10	10.20	8.30	7.20				
11	11.00	9.10	8.00				
12	11.80	9.90	8.80				

ITEM NO.	DESCRIPTION	DRAWN	DATE
4	更新Current rating	Jack	050826
3	更新PIN選項	Jack	042224
2	更新Peg鍍層	Jack	113022
1	更新Contact鍍層	Jack	112422

**建倚科技股份有限公司**  
**CONTACT TECHNOLOGY CORP.**

TOLERANCE UNLESS OTHERWISE STATED :  
 Up to 5 ±0.2  
 Above 5 ~ 15 ±0.3  
 Above 15 ~ 30 ±0.4  
 Above 30 ~ 50 ±0.5  
 Angle ±0.3

3RD. ANGEL'S  

 UNITS MM

DRAWN BY:	DATE	MATL	TITLE	CONNECTOR
Jack Lu	05/08/26			
CHECKED BY:	DATE	FINISH	MODLE	WAFER 0.8mm . SMT 90度
Jacky Chen	05/08/26			
APPROVED BY:	DATE	SCALE	DWG NO.	WF-0801RSxx-S149
Tony Kao	05/08/26	1 : 1		
		SHEET NO.	PART NO.	WF-0801RSxx-S149
		1 of 1		