

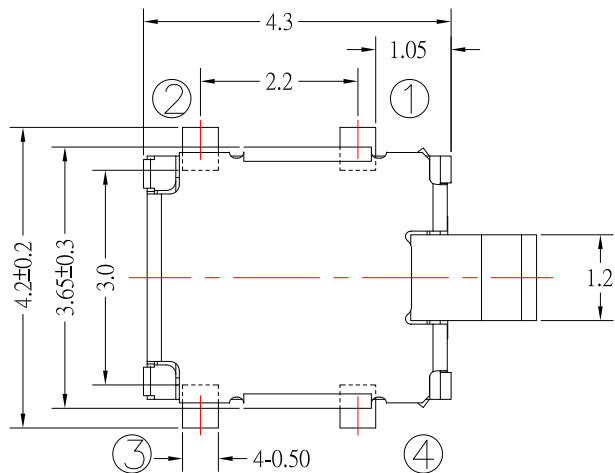
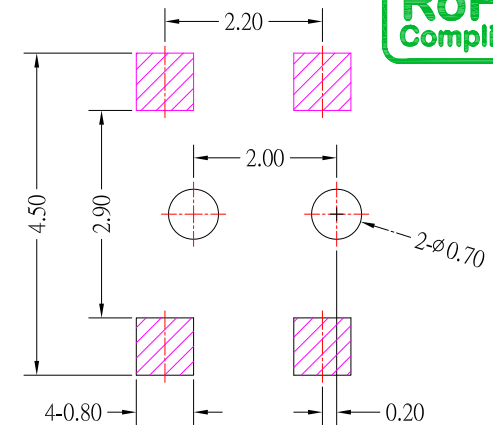


CIRCUIT

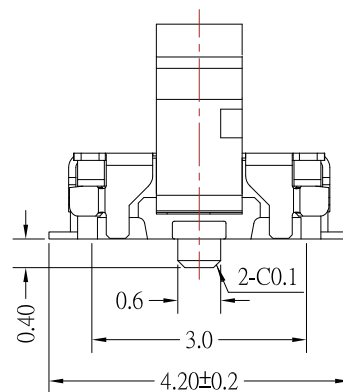

P.C.B. LAYOUT

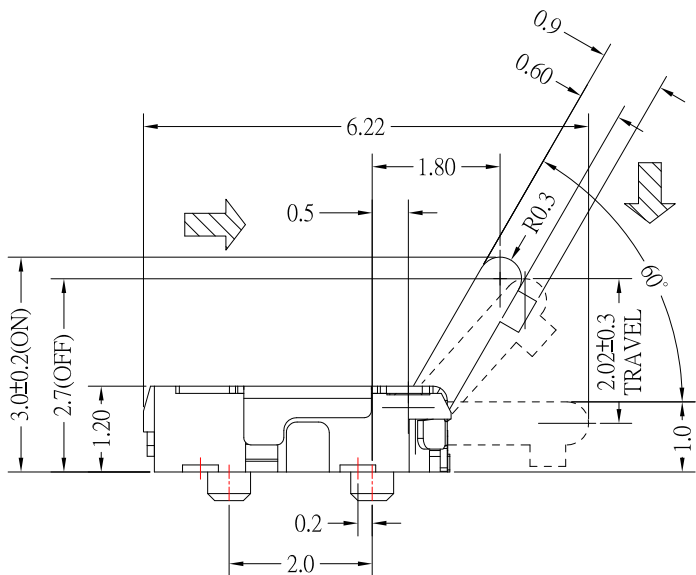

SPECIFICATIONS

- 1.RATING: DC 5.0V,1.0mA ; DC 3.0V,1.0uA
- 2.CONTACT RESISTANCE: 3Ω Max.
- 3.INSULATION RESISTANCE: 100MΩ Min.
- 4.WITHSTAND VOLTAGE: AC 100V/ MINUTE.
- 5.OPERATING FORCE: 35gf Max.
- 6.OPERATING LIFE CYCLE: 50,000 CYCLES.

6	SPACER	1	PA46	
5	TERMINAL	1	PBS	Ag plating
4	HOUSING	1	LCP	
3	CONTACT FORM	1	PBS	Ag plating
2	COVER	1	SUS	
1	STEM	1	PA46	
NO	PART NAME	QTY	MATERIAL	REMARK



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 03/18/22
DATE: 03/18/22
DATE: 03/18/22

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

SWITCH
DETECTOR SWITCH(PUSH OFF TYPE)
DS-C52E-S138
DS-C52E-S138

SIZE
A4
VER
R1

ITEM NO	DESCRIPTION	DRAWN	DATE
1	新增ON和OFF和TRAVEL標示	Jack	031822