

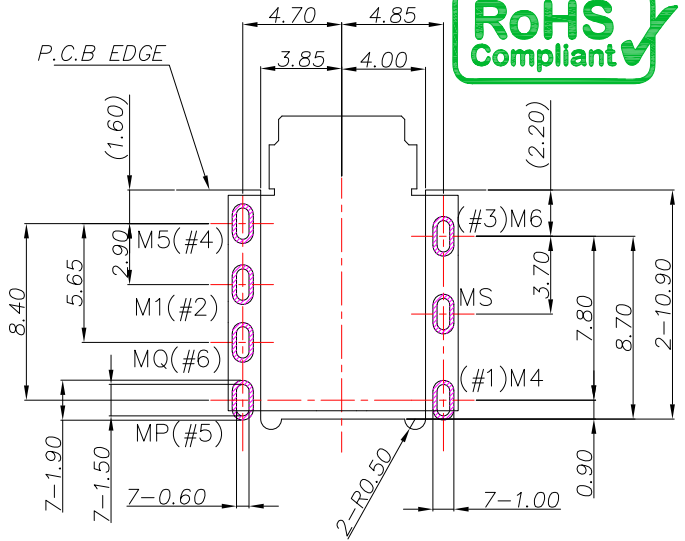
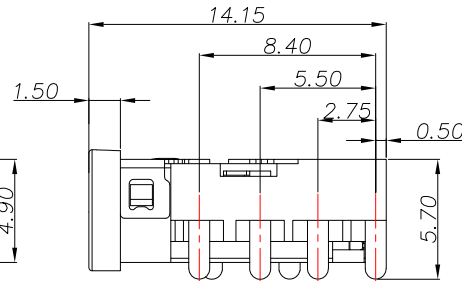
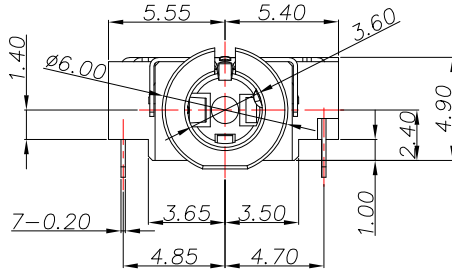
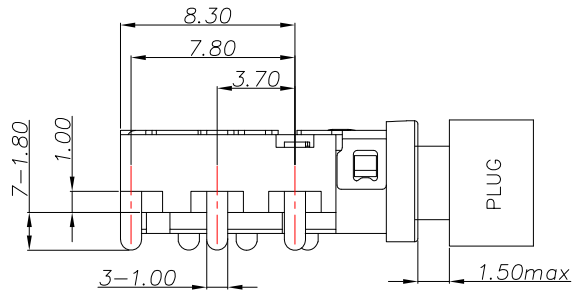


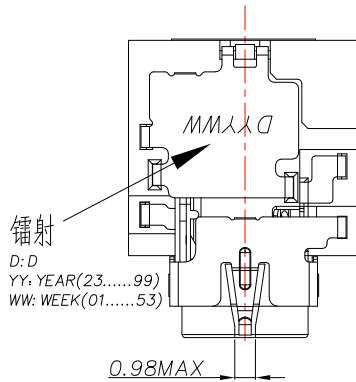

P.C.B LAYOUT
TOP VIEW

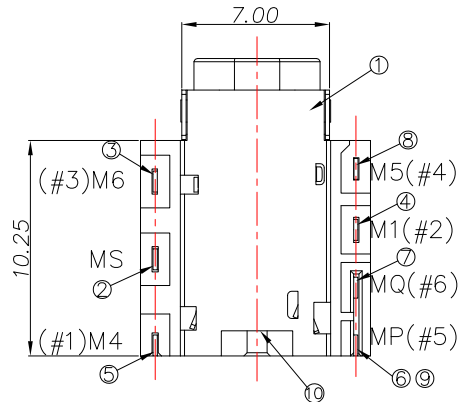

SCHEMATIC	
✓	•M6(#3)G/M
✓	•M4(#1)L/R
△	•MP(#5)
↑	•MQ(#6)
~	•M1(#2)R/L
~	•M5(#4)M/G

SPECIFICATION	
1.Contact resistance :	≤ 50mΩ
2.Insulation resistance :	≥ 100MΩ
3.Withstand voltage :	250VAC
4.Insertion and extraction force :	3-30N
5.life test :	5,000 cycles

ITEM	DESCRIPTIONs	MATERIAL	FINISH	Q'TY
⑩	DUMMY PIN	STAINLESS STEEL	—	1
⑨	SEPARATOR	PA9T	BLACK	1
⑧	M5_CONTACT	PHOSPHOR BRONZE	Au: GOLD FLASH Ni	1
⑦	MQ_SHUNT	PHOSPHOR BRONZE		1
⑥	MP_CONTACT	PHOSPHOR BRONZE		1
⑤	M4_CONTACT	PHOSPHOR BRONZE		1
④	M1_CONTACT	PHOSPHOR BRONZE	Ni	1
③	M6_CONTACT	PHOSPHOR BRONZE		1
②	MS_SHELL	PHOSPHOR BRONZE	BLACK	1
①	P1_HOUSING	PA9T	BLACK	1

ITEM NO.	DESCRIPTION	DRAWN	DATE
4	更新日期樣式	Jack	080825
3	更新樣式	Jack	051525
2	更新樣式	Jack	060623
1	更新樣式和材質和鍍層	Jack	111722

TOLERANCE UNLESS OTHERWISE STATED :		Up to 5 ±0.2	Above 5 ~ 15 ±0.3	Above 15 ~ 30 ±0.4	Above 30 ~ 50 ±0.5	Angle ±0.3°
3RD. ANGEL'S		UNITS		MM		

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	08/08/25	FINISH	MODLE	PHONE JACK
CHECKED BY:	DATE	SCALE	DWG NO.	PJ-S3R2A7-S214
Jacky Chen	08/08/25	SHEET NO.	1 of 1	PART NO. PJ-S3R2A7-S214
APPROVED BY:	DATE			
Tony Kao	08/08/25			